

Door Hardware & Partitioning Systems for Glass

Create stylish Door Entrances and Partition Systems from our extensive range of Handles, Patch Fittings, Floorsprings, Locks, Sliding Door Systems, Channels, and Spider Fittings



Contents

Floorsprings	04
Patch Fittings	05
Door Rails and Locks	11
Middle Locks	14
Ladder Pulls	16
Door Hinges	20
Sliding Door Systems	24
Bi-Fold Door Systems	28
Partitioning Systems	32
Spider Fittings	38
Fixing Brackets	44
Installation Tools and Accessories	46



For more information call FREE on

00 800 0421 6144

e: CRL@crlaurence.co.uk f: 00 800 0262 3299




A photograph of a modern office interior featuring glass partitions and doors. The glass has a horizontal ribbed texture. Several doors are visible, each equipped with a silver-colored handle and a floor spring. The ceiling is white with a grid of small, circular perforations. A dark grey rectangular box is overlaid on the right side of the image, containing the text "Door Hardware" and "Floor Springs & Patch Fittings" in white. A small blue square is located to the right of the text box.



Door Hardware

Floor Springs & Patch Fittings

CODE	DESCRIPTION
 <p>CRL8460 Hold Open</p> <p>CRL8462 No Hold Open</p> <p>CRL8460COF Coffer Box for Suspended Floors</p>	<p>CRL Medium Duty 180 Degree Narrow Width Floor Mounted Closer</p> <ul style="list-style-type: none"> • The perfect door closer to support CRL's patch hardware • 120kg capacity, 1067mm doors • Narrow 78mm width • Interchangeable spindle heights • 5 Year limited warranty • UL listed <p>Warranty information and cross reference chart available</p>
 <p>CRL8542 180° No Hold Open</p> <p>CRL8544 90° Hold Open</p> <p>CRL8546 105° Hold Open</p>	<p>CRL Size 4 Spring Heavy Weight Floor Mounted Door Closer</p> <ul style="list-style-type: none"> • The perfect door closer to support CRL's door rail system • 363kg capacity, up to 1372mm doors • Interchangeable spindle heights • Independent closing and latching speed adjustments • 5 Year limited warranty • UL listed <p>Warranty information and cross reference chart available / Size 3 and 5 also available</p>
 <p>J990NH0D No Hold Open</p> <p>J993H0D 90° and 120° Dual Hold-Open</p> <p>J994H0D 105° Hold Open</p> <p>J995BCD 180° Swing No Hold- Open Backcheck @ 85°</p>	<p>CRL Jackson® 900 Series Spring Power Adjustable Floor Mounted Closer with Basic Package</p> <ul style="list-style-type: none"> • 453kg capacity, 1372mm doors • Multi-size spring power adjustable • Interchangeable spindle heights • Leveling and door centring adjustments • 10 Year limited warranty • UL listed
 <p>J990NH0N No Hold Open</p> <p>J993H0N 90° and 120° Dual Hold-Open</p> <p>J994H0N 105° Hold Open</p> <p>J995BCN 180° Swing No Hold- Open Backcheck @ 85°</p>	<p>CRL Jackson® 900 Series Spring Power Adjustable Floor Mounted Closer with Centre-Hung Package</p> <ul style="list-style-type: none"> • 453kg capacity, 1372mm doors • Multi-size spring power adjustable • Interchangeable spindle heights • Leveling and door centring adjustments • 10 Year limited warranty • UL listed
 <p>J7020CPBS Brushed Stainless</p> <p>J7020CPPS Polished Stainless</p>	<p>CRL Cover Plates for Jackson® 900 Series Floor Mounted Closer</p> <ul style="list-style-type: none"> • Fits 900 series floor mounted door closers • Allows for full closer adjustment without removing door
 <p>CRL9040S8 7.9mm</p> <p>CRL9040S13 13mm</p> <p>CRL9040S18 19mm</p> <p>CRL9040S23 22mm</p>	<p>CRL Interchangeable Floor Closer Spindles</p> <ul style="list-style-type: none"> • Use with all CRL models, Jackson 900, and DORMA® BTS80 series floor mounted door closers • Six available heights from 3.2 To 33.3mm • Flat tapered type

	CODE	DESCRIPTION
	PH21ABS Brushed Stainless	CRL Top Door Patch Fitting with 1NT303 Insert <ul style="list-style-type: none"> • European 65mm pivot setback • High density cast body • Gaskets for use with 10 or 12mm glass • For use with Free Swing Top Pivot
	PH21APS Polished Stainless	
	PH21CBS Brushed Stainless	CRL Adjustable European Top Door Patch Fitting <ul style="list-style-type: none"> • Adjustable pivot insert allows three degrees movement for proper door alignment • 65mm pivot setback • For 10 or 12mm glass • For use with Concealed Overhead Closer
	PH21CPS Polished Stainless	
	PH11CBS Brushed Stainless	CRL Bottom Door Patch with 1NT301 Insert <ul style="list-style-type: none"> • 65mm pivot setback • For 10 or 12mm glass • For use with Floor Spring/Free Swing Bottom Pivot
	PH11CPS Polished Stainless	
	PH40BS Brushed Stainless	CRL Sidelite Transom Patch with 1NT300 Insert <ul style="list-style-type: none"> • Works with both 70mm and 65mm pivot setback door patch fittings • For 10 or 12mm glass
	PH40PS Polished Stainless	
	PH34BS Brushed Stainless	CRL Wall Mounted Transom Patch with 1NT300 Insert <ul style="list-style-type: none"> • For 10 or 12mm glass
	PH34PS Polished Stainless	
	PH41LBS Left Hand Brushed	CRL Sidelite Transom Patch with Support Fin Bracket and 1NT300 Insert <ul style="list-style-type: none"> • Works with both 70mm and 65mm pivot setback door patch fittings • For 10 or 12mm glass • Left and right handed
	PH41LPS Left Hand Polished	
	PH41RBS Right Hand Brushed	
	PH41RPS Right Hand Polished	

	CODE	DESCRIPTION
	PH42LBS Left Hand Brushed	CRL 90 Degree Sidelite Patch with 1NT300 Insert
	PH42RBS Right Hand Brushed	<ul style="list-style-type: none"> • Works with 65mm pivot setback door patch fittings • For 10 and 12mm glass • Left and right handed
	PH42LPS Left Hand Polished	
	PH42RPS Right Hand Polished	
	PH51BS Brushed Stainless	CRL Double Transom Patch with Fin and Two 1NT300
	PH51PS Polished Stainless	<ul style="list-style-type: none"> • Works with both 70mm and 65mm pivot setback door patch fittings • High density cast body • For 10 or 12mm glass
	PH94BS Brushed Stainless	CRL Ceiling Mounted Support Fin Bracket Patch Fitting
	PH94PS Polished Stainless	<ul style="list-style-type: none"> • For 10 or 12mm glass
	PH71BS Brushed Stainless	CRL Transom Mounted Patch Connector with Support Fin Bracket
	PH71PS Polished Stainless	<ul style="list-style-type: none"> • For 10 or 12mm glass
	PH80BS Brushed Stainless	CRL Brushed Stainless 4-Way Patch Connector
	PH80PS Polished Stainless	<ul style="list-style-type: none"> • For 10 or 12mm glass
	PH81BS Brushed Stainless	CRL 4-Way Patch Connector with Support Fin Bracket
	PH81PS Polished Stainless	<ul style="list-style-type: none"> • For 10 or 12mm glass


	CODE	DESCRIPTION
	PH60BS Brushed Stainless	CRL Sidelite Mounted Transom Patch with Reversible Door Stop with 1NT310 Insert <ul style="list-style-type: none"> • For 10 or 12mm glass • Doors can swing either in or out • 1 x 1NT310 CRL Door Stop Insert included
	PH60PS Polished Stainless	
	PH70BS Brushed Stainless	CRL Transom Mounted Connector with Two Reversible Door Stops with 1NT310 Inserts <ul style="list-style-type: none"> • For 10 or 12mm glass • Doors can swing either in or out • One door can swing in and the other out • 2 x 1NT310 CRL Door Stop Inserts included
	PH70PS Polished Stainless	
	EUR205BS Brushed Stainless	CRL EUR Series Complete Patch Lock Including Cylinder <ul style="list-style-type: none"> • High density cast body with lock mechanism • Gaskets for use with 10 or 12mm glass • For 10 or 12mm glass
	EUR205PS Polished Stainless	
	EUR206BS Brushed Stainless	CRL Brushed Stainless EUR Series Sidelite or Glass Door Mounted Keeper <ul style="list-style-type: none"> • For use with EUR205 series patch lock • High density cast body with lock mechanism • For 10 or 12mm glass
	EUR206PS Polished Stainless	
	1NT401	CRL Free Swing Top Pivot <ul style="list-style-type: none"> • Surface mount top pivot type for use with patch fittings and CRL Wedge-Lock™ door rail system • Brushed stainless finish



	CODE	DESCRIPTION
	1NT402	CRL Floor Mounted Bottom Free-Swinging Pivot <ul style="list-style-type: none"> • 22mm flat tapered spindle • 200kg capacity
	1NT403	CRL Adjustable Free-Swinging Floor Pivot <ul style="list-style-type: none"> • For use with our low profile door rails, PH10C, PH11C, and EUR410 bottom door patch fittings • 100kg capacity • 9.5mm minimum clearance • 5mm height adjustment • Aluminium in colour
	1NT405	CRL Brushed Stainless Finish Header Mounted Top Free Swinging Pivot <ul style="list-style-type: none"> • For use with top door patch fittings • Mounts in masonry or metal header
	1NT406	CRL Adjustable Free-Swinging Floor Pivot with Tapered Flat Spindle <ul style="list-style-type: none"> • Flat tapered spindle • 100kg capacity • Provides 6mm height adjustment
	CRL9040WBP	CRL Walking Beam Top Pivot <ul style="list-style-type: none"> • For centre-hung applications when using a concealed floor mounted door closer • Optional cover plates available in several finishes
	CRL9040CPBS Brushed Stainless CRL9040CPPS Polished Stainless	CRL Brushed Stainless Walking Beam Top Pivot Cover Plat <ul style="list-style-type: none"> • Used to cover and conceal the crl walking beam top pivot • Five finishes available • For centre-hung applications when using a concealed floor mounted door closer
		

	CODE	DESCRIPTION
	1NT304	CRL Top Door Closer Patch Insert for Use with Door Closers with 14mm Square Spindle <ul style="list-style-type: none"> • For use with PH20 and PH21 top door patch fittings • Suitable for use with standard 14mm square spindle overhead concealed door closers
	1NT306	CRL Transom Patch Door Stop Insert <ul style="list-style-type: none"> • For use with Cat. Nos. PH34, PH40, PH41L, PH41R, PH42L, PH42R, PH43L, PH43R and PH51 transom patch fittings to create a door stop
	1NT310	CRL Door Stop Insert for PH60/70 <ul style="list-style-type: none"> • For use with: PH60 and PH70
	EUR208PS	CRL Polished Stainless Finish “Easy Clean” European Style Bottom Keeper with Mounting Plate <ul style="list-style-type: none"> • For use with our EUR205 patch lock
	J580BS Brushed Stainless	CRL Jackson® Heavy-Duty Adjustable Centre-Hung Walking Beam Type Top Pivot with Brushed Stainless Cover Plate <ul style="list-style-type: none"> • Walking beam type pivot • For centre-hung doors weighing up to 454kg • Allows for easy door removal and adjustment • Lateral pin adjustment
	J580PS Polished Stainless	

CRL Door Rails and Locks



Kwik-Adjust™ Pivot Alignment System



- Available in six different finishes
- Matching sidelites available
- Available with or without Locks (Eurocylinders Locks)
- Designed to work effectively with full CRL range of products - Patch fittings, Handles, Locks & Floorsprings
- A range of standard length Door Rails available, including Low Profile, Tapered and Square Rails

We are proud to introduce our patented Wedge-Lock™ Glass Securing System, now with the Kwik-Adjust™ Pivot Alignment System that allows the installer to quickly and easily adjust the lateral alignment of the pivot centres by simply turning a single screw in either the top or bottom rail of the door. All of our 102mm, 152mm and 254mm tall Door Rails, as well as our Patch Rails, utilize both Wedge-Lock™ and Kwik-Adjust™ technologies, giving you the most versatile rail system on the market today.


KEY DETAILS

- Manufactured door rails cut to length from stock in Manchester (102mm Square only)
- Cut to length - between 750mm and 1250mm, for rails 102mm in height
- Door Rails for 15mm and 19mm glass available by special request
- Fully adjustable - adjust and align doors
- Features the Kwik-Adjust™ vertical Jamb Alignment System, adjustable door left to right +/- 3mm
- Door assembly can be ready for installation in less than 10 minutes
- Doors fully adjustable along the line of the closed position

Complete Adjustment **A B C**

A How the Wedge-Lock™ Glass Securing System Works

The Wedge-Lock™ System works by applying pressure evenly along both sides of the glass. Simply tighten the jaw screws, accessed from the hardware pocket of the rail. The screws then draw down a flat stainless steel bar. The steel bar in turn pulls down the gripping jaws. This action then forces the jaws towards one another, creating a tremendous amount of force against the glass, holding it securely in place.



Exclusive Wedge-Lock™ Glass Securing System



Kwik-Adjust™ Pivot Alignment System

B Jamb Adjustment

To Adjust the Door Rail Away From the Jamb


1. Remove the end cap (one screw). This will reveal the adjustment screw.
2. Insert the T912 T-Handle Key into the screw and turn the screw clockwise to the proper clearance from the jamb.
3. Replace the End Cap.

To Adjust the Door Rail Towards the Jamb

1. Remove the end cap (one screw).
2. Insert the T912 T-handle key into the screw and turn the screw counter-clockwise to the proper clearance from the jamb.
3. Replace the end cap.



C Centring Adjustment

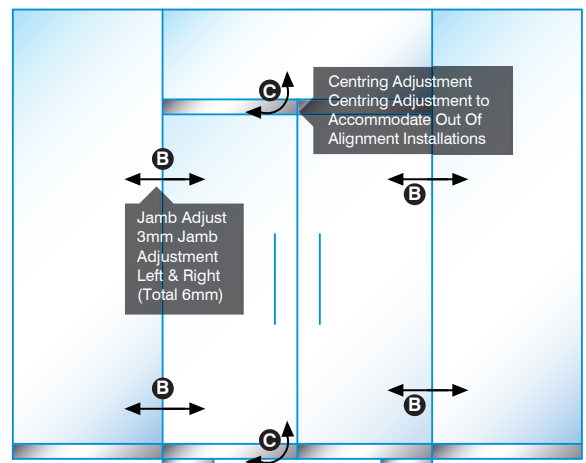To centre the door you just loosen the two Pan Head Phillips Screws, holding the arm to the block, then adjust the two hex bolts at the end of each arm to slightly change the angle of the arm as it mounts in the Door Rail. Make sure that both hex bolts are tightened against the inside face of the Door Rail, and the two Pan Head Phillips Screws are tightened to the block when adjustment is complete.






Door centring is easily achieved by turning the two hex head bolts.






CODE	DESCRIPTION
	EDR4SBS38 Brushed Stainless (10mm Glass)
	EDR4SBS12 Brushed Stainless (12mm Glass)
	EDR4SPS38 Polished Stainless (10mm Glass)
	EDR4SPS12 Polished Stainless (12mm Glass)
CRL Wedgelock Door Rails <ul style="list-style-type: none"> • Patented Wedge-Lock™ glass securing system • For 10mm or 12mm glass (15mm and 19mm on request) • Door rails up to 1250mm wide • Adjust and align doors without removal • Nine standard architectural finishes • Custom sizes are also available 	
	EDR4SBS38L Brushed Stainless (10mm Glass)
	EDR4SBS12L Brushed Stainless (12mm Glass)
	EDR4SPS38L Polished Stainless (10mm Glass)
	EDR4SPS12L Polished Stainless (12mm Glass)
CRL Wedgelock Door Rails with Locks <ul style="list-style-type: none"> • Patented Wedge-Lock™ glass securing system • For 10mm or 12mm glass (15mm and 19mm on request) • Door rails up to 1250mm wide • Adjust and align doors without removal • Nine standard architectural finishes • Custom sizes are also available • Available with locks 	
	AMR207BN Brushed Nickel
	AMR207PS Polished Stainless
Dust Proof Keeper <ul style="list-style-type: none"> • Accepts a 16mm Plunger • Three Finishes Available <p>CRL dustproof keepers are intended for use with our door rail locks. They are easy-to-install and only require a 25.4mm diameter by 51mm deep hole in the floor.</p>	
	AMR209BN Brushed Nickel
	AMR209PS Polished Stainless
CRL Locking Dustproof Keeper <ul style="list-style-type: none"> • Accepts 16mm diameter plunger bolt • Three Finishes Available <p>CRL dustproof keepers are intended for use with our door rail locks. They are easy-to-install and only require a 25.4mm diameter by 51mm deep hole in the floor.</p>	
	EC3BS Brushed Stainless
	EC3PS Polished Stainless
	EC3BSKA Brushed Stainless
	EC3PSKA Polished Stainless
CRL Brushed Stainless Cylinder Lock with Thumbturn <ul style="list-style-type: none"> • Works on PTH311 series lever latch installation and euro style patch locks EUR205, EUR680, and EUR681 • Available in three finishes • Available individual key or keyed alike 	
	EC5BS Brushed Stainless
	EC5PS Polished Stainless
	EC5BSKA Brushed Stainless Keyed alike
	EC5PSKA Polished Stainless Keyed alike
CRL Brushed Stainless Extended Length Keyed Cylinder/Cylinder <ul style="list-style-type: none"> • Works on PTH311 series lever latch installation and euro style patch locks EUR205, EUR680, and EUR681 • Available in three finishes • Available individual key or keyed alike 	

CODE	DESCRIPTION
 <p>DRWSAS Satin Anodised 908mm length</p> <p>DRWSA144 Satin Anodised 3660mm length</p>	<p>CRL Satin Anodised Pile Weatherstrip for Single Door Rail</p> <ul style="list-style-type: none"> • Specially designed to help reduce air and water infiltration • Fits all CRL door rails • Available in two finishes
 <p>W12SAS Satin Anodised</p> <p>W12PSS Polished Stainless</p> <p>W34SAS Satin Anodised</p> <p>W34PSS Polished Stainless</p>	<p>CRL Vertical Weatherstile Kits</p> <ul style="list-style-type: none"> • W12SXX for 12mm glass • WS34XX for 19mm glass • 2 lengths of Weatherstile with wool pile strip • 1 x black EPDM filler for double doors • 2.97m length 
 <p>SR4SBS3812SL Brushed Stainless Rail</p> <p>SR4SPS3812SL Polished Stainless Rail</p>	<p>CRL Brushed Stainless 3.05m Length Square Sidelite Rail</p> <ul style="list-style-type: none"> • Nine standard architectural finishes, custom finishes, and powder painting • Top load roll-in gasket for 10 and 12mm glass (included for 12mm) • Extruded saddle is reversible to match 6mm 19mm door clearances • Match door rails for even sightline • 15 or 19mm available on special request
 <p>SREC4SBS Brushed Stainless</p> <p>SREC4SPS Polished Stainless</p>	<p>CRL Brushed Stainless 102mm Square End Cap for Sidelite Rails</p> <ul style="list-style-type: none"> • Several finishes available to match CRL Sidelite Rails • For 102mm square sidelite rails • Heavy forged castings
 <p>GG38100 Black</p>	<p>CRL 10mm Roll-In EPDM Gasket for Sidelite Rails</p> <ul style="list-style-type: none"> • Dry glaze push-in top load glazing gasket • 30.5m roll • For 10mm glass
 <p>UCSB4</p>	<p>CRL Aluminium/Neoprene Setting Block for Glass</p> <ul style="list-style-type: none"> • Protects glass edge while providing rigid glass support in sidelite rails and U-Channel • Provides proper height for recommended glass coverage

CODE	DESCRIPTION
 <p>PTH311BS Brushed Stainless</p> <p>PTH311PS Polished Stainless</p>	<p>CRL Glass Mounted Latch with Lock and Thumbturn Cylinder</p> <ul style="list-style-type: none"> • Works on single or double doors • For 10 or 12mm glass • Field reversible • 304 grade stainless steel • Lever handles not included
 <p>PTH312BS Brushed Stainless</p> <p>PTH312PS Polished Stainless</p>	<p>CRL Glass Mounted Passage Latch</p> <ul style="list-style-type: none"> • Works on single or double doors • For 10 or 12mm glass • 304 grade stainless steel • Lever handles not included
 <p>PTH314BS Brushed Stainless</p> <p>PTH314PS Polished Stainless</p>	<p>CRL PTH Series Glass Mounted Long Patch Lock Keeper</p> <ul style="list-style-type: none"> • For use with 10mm or 12mm thick glass • Stamped body with finished cover plates • Works with either latch above on double doors
 <p>PTH303BS Brushed Stainless</p> <p>PTH303PS Polished Stainless</p>	<p>CRL Extended Length Keyed Cylinder/Cylinder</p> <ul style="list-style-type: none"> • For use with PTH311 and PTH312 glass mounted latch mechanisms • Available in three finishes • Includes: hex wrench
 <p>PTH302BS Brushed Stainless</p> <p>PTH302PS Polished Stainless</p>	<p>CRL PTH Series Tubular Style Lever Handle</p> <ul style="list-style-type: none"> • For use with PTH311 and PTH312 glass mounted latch mechanisms • Includes: hex wrench • Available in four finishes
 <p>PTH306BS Brushed Stainless</p> <p>PTH306PS Polished Stainless</p>	<p>CRL PTH Series Modern Style Lever Handle</p> <ul style="list-style-type: none"> • For use with PTH311 and PTH312 glass mounted latch mechanisms • Includes: hex wrench • Available in four finishes

CODE	DESCRIPTION
	DL410LBS Brushed Stainless LH/RHR
	DL410RBS Brushed Stainless RH/LHR
	DL410LPS Polished Stainless LH/RHR
	DL410RPS Polished Stainless RH/LHR
<hr/>	
	DLK410BS Brushed Stainless
	DLK410PS Polished Stainless
<hr/>	
	DT410BS Brushed Stainless
	DT410PS Polished Stainless
<hr/>	
	DH410BS Brushed Stainless
	DH410PS Polished Stainless
<hr/>	
	DTK410BS Brushed Stainless
	DTK410PS Polished Stainless

	CODE	DESCRIPTION
	24LPBS Brushed Stainless	CRL Grade 304 Satin Stainless Steel T Style Door Pull Handle <ul style="list-style-type: none"> • Eleven sizes in two popular finishes • For 10 to 19mm glass or 44mm aluminium doors • Extra height for eye-catching contemporary and elegant appearance • 32mm diameter heavy wall 304 alloy stainless steel tubing • Stock sizes up to 2134mm, please see crlaurence.co.uk for more details • Custom finishes and sizes available
	24LPPS Polished Stainless	
	36LPBS Brushed Stainless	
	36LPPS Polished Stainless	
	42LPBS Brushed Stainless	
	42LPPS Polished Stainless	
	48LPBS Brushed Stainless	
	48LPPS Polished Stainless	
	60LPBS Brushed Stainless	
	60LPPS Polished Stainless	
	72LPBS Brushed Stainless	
	72LPPS Polished Stainless	
	84LPBS Brushed Stainless	
	84LPPS Polished Stainless	
	CM10X10BS Brushed Stainless	CRL Straight Back-to-Back Pull Handles <ul style="list-style-type: none"> • Stocked in up to five architectural finishes • For use with 10 to 19mm glass • Complete with matching finish metal washers and through-bolts for mounting
	CM10X10PS Polished Stainless	
	SQ10X10BS Brushed Stainless	CRL Glass Mounted Square Tube Style Back-to-Back Pull Handle <ul style="list-style-type: none"> • For 10 and 19mm glass • Includes mounting hardware
	SQ10X10PS Polished Stainless	

	CODE	DESCRIPTION
	RST10X10BS Brushed Stainless	CRL Glass Mounted Rounded Corner Square Tube Style Back-to-Back Pull Handle <ul style="list-style-type: none"> • For 10 and 19mm glass • Includes mounting hardware • Available in four sizes and two finishes
	RST10X10PS Polished Stainless	
	LLP059BS Brushed Stainless	CRL 1499mm Locking Ladder Pull <ul style="list-style-type: none"> • Locks into the floor only • Lock operates at a comfortable 1200mm above the floor • 35mm diameter alloy 316 brushed stainless steel tubing
	LLP084BS Brushed Stainless	CRL 2134mm Double Locking Ladder Pull <ul style="list-style-type: none"> • Locks at both top and bottom • Lock operates at a comfortable 1200mm above the floor • 35mm diameter alloy 316 brushed stainless steel tubing
	LPK1BS Brushed Stainless	35mm Diameter Brushed Stainless Ladder Keeper <ul style="list-style-type: none"> • 35mm diameter alloy 316 brushed stainless steel tubing
	58DKBS Chrome Plated	CRL Chrome Plated Brass 16mm Dust Proof Keeper for Locking Ladder Pulls <ul style="list-style-type: none"> • For CRL locking ladder pulls • Accepts 16mm throw bolt • Chrome plated brass

Internal Door Hinges








For more information call FREE on

00 800 0421 6144

e: CRL@crlaurence.co.uk f: 00 800 0262 3299



	CODE	DESCRIPTION
	31M8010CH Chrome	CRL Biloba Full Back Plate Wall-to-Glass Hinge <ul style="list-style-type: none"> • For self-closing glass doors from 8 to 12mm thick • Recommended for use as entry doors to bathroom/shower area • Aluminium body in your choice of three finishes: brite chrome, brushed satin, and satin anodised • Hold open or no hold open models • Adjustable closing speed • Other finishes available on request
	31M8010SN Brushed Satin	
	31M8015CH Chrome	CRL Biloba 180° Glass-to-Glass Hinge <ul style="list-style-type: none"> • For self-closing glass doors from 8 to 12mm thick • Recommended for use as entry doors to bathroom/shower area • Aluminium body in your choice of three finishes: brite chrome, brushed satin, and satin anodised • Hold open or no hold open models • Adjustable closing speed • Other finishes available on request
	31M8015SN Brushed Satin	
	31M8060CH Chrome	CRL Biloba 8060 Hydraulic All-Glass Door Hinge <ul style="list-style-type: none"> • For self-closing glass doors from 8 to 12mm thick • Recommended for use as entry doors to bathroom/shower area • Aluminium body in your choice of three finishes: brite chrome, brushed satin, and satin anodised • Hold open or no hold open models • Adjustable closing speed • Other finishes available on request
	31M8060SN Brushed Satin	
	PTH350CH Chrome	CRL Barcelona Free Swinging Interior Door Hinge <ul style="list-style-type: none"> • 8 or 10mm toughened glass • Glass fabrication - two 8mm holes required per hinge • Solid brass construction • Mounting brackets ordered separately • Available in polished chrome, polished brass, and brushed nickel finishes • Other finishes available on request
	PTH350BR Brushed Nickel	
	PTH351CH Chrome	CRL Roma Free Swinging Interior Door Hinge <ul style="list-style-type: none"> • 8 or 10mm toughened glass • Solid brass construction • Available in polished chrome, polished brass, and brushed nickel finishes • Mounting brackets ordered separately • Other finishes available on request
	PTH351BN Brushed Nickel	

CODE	DESCRIPTION
 <p>PTH352SA Satin Anodised</p>	<p>CRL Valencia Free Swinging Interior Door Hinge</p> <ul style="list-style-type: none"> • 8 or 10mm toughened glass • Solid aluminium construction • Satin anodised finish
 <p>PTH360 Surface Mount</p>	<p>CRL Euro Series Mounting Brackets for Free Swinging Interior Hinges</p> <ul style="list-style-type: none"> • CRL steel frame mount euro series mounting bracket for free swinging interior door hinge • Three models available to fit euro series door hinges • Zinc plated steel
 <p>PTH361 Steel Frame Mount</p>	<p>CRL Euro Series Mounting Brackets for Free Swinging Interior Hinges</p> <ul style="list-style-type: none"> • CRL steel frame mount euro series mounting bracket for free swinging interior door hinge • Three models available to fit euro series door hinges • Zinc plated steel
 <p>PTH362 Surface Mount</p>	<p>CRL Euro Series Mounting Brackets for Free Swinging Interior Hinges</p> <ul style="list-style-type: none"> • CRL steel frame mount euro series mounting bracket for free swinging interior door hinge • Three models available to fit euro series door hinges • Zinc plated steel
 <p>PTH353SA Satin Anodised</p>	<p>CRL Sofia Free Swinging Interior Door Hinge</p> <ul style="list-style-type: none"> • 8 or 10mm toughened glass • Solid aluminium construction • Satin anodised finish

A modern interior space featuring a large, dark-framed mirror on a light-colored wall. Below the mirror is a long, low wooden console table with a small green vase containing dried branches. To the right, a set of frosted glass sliding doors leads to another room with light wood flooring, a white wall, and a window with sheer curtains. A white spherical pendant light hangs in the background room. The overall aesthetic is clean and contemporary.

Sliding Doors

For more information call FREE on

00 800 0421 6144

e: CRL@crlaurence.co.uk f: 00 800 0262 3299



CRL[®]
crlaurence.co.uk

CRL280 Series Top Hung Sliding Door System

Glass Mount Option Available



- Sleek design
- No notches or holes required in the glass for installation
- Designed for use with 8, 10, or 12mm toughened glass
- Rated for doors weighing up to 80kg

The new CRL280 series Top Hung Sliding Door System is truly the most versatile system of its kind. There are six different kits to choose from, offering configurations with or without fixed panels, and the ability to mount either to the wall, ceiling or glass panels.

The CRL280 System has no bottom track, so a tripping hazard is eliminated, and the smooth sliding action allows for finger touch control. The upper clamp and roller assemblies have a fine tune adjustment feature allowing for openings and floors that are not true and level. Each kit comes with concealed stops in the top track to hold the door open or closed.

Kits are available in a satin anodised finish, with a special order option to clad or powder paint in any architectural finish desired.

Soft Brake Available.



Available CRL280 Kits

- Kits contain all necessary hardware to complete the installation
- Rollers have up to 6mm of vertical adjustment to aid in door alignment after installation
- Satin anodised finish

There are three configurations of CRL280 Series Kits. All come with everything you need (except the toughened glass) to complete the installation. Kits are available in a satin anodised finish, with a special order option to clad or powder paint in any architectural finish desired. Contact technical sales for commercial products for kit selection or installation assistance.

NOTE: Laminated glass should not be used with the CRL280 Series.



Single Sliding Door Kits for 8 to 10mm Toughened Glass

CAT. NO.	KIT DESCRIPTION
CRL2810	Single sliding door wall or ceiling mount installation
CRL2810F	Single sliding door with fixed panel wall or ceiling mount installation
CRL2810G	Single sliding door glass fixed panel mount installation

Single Sliding Door Kits for 12mm Toughened Glass

CAT. NO.	KIT DESCRIPTION
CRL2812	Single sliding door wall or ceiling mount installation
CRL2812F	Single sliding door with fixed panel wall or ceiling mount installation
CRL2812G	Single sliding door glass fixed panel mount installation

Minimum order: 1 each. Kits contain stock lengths of Top Track measuring 3m in length, and therefore must ship common carrier. Kits can be combined for quantity pricing.

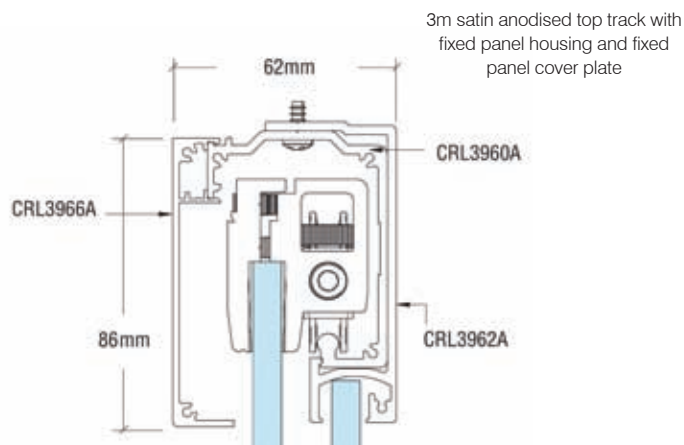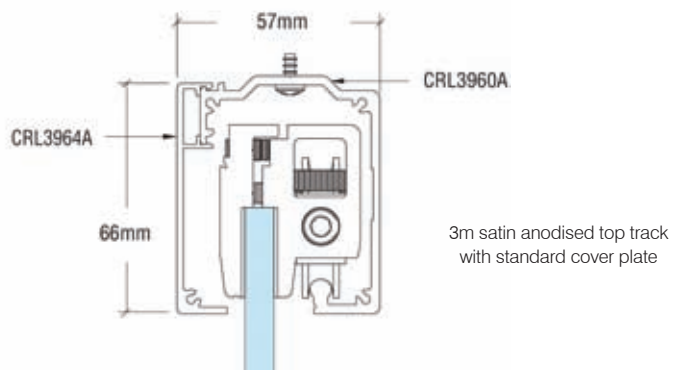

CRL50 Series Top Hung Sliding Door Systems



- Models for single doors, synchronized doors, and telescoping doors
- For use with 8 or 10mm toughened glass
- No notches or holes required in the glass
- Mounts to wall or ceiling
- Can accommodate doors weighing up to 80kg

Soft Brake Available.

The new CRL50 Series Top Hung Sliding Door Systems feature a sleek design that offers options for wall or ceiling mount for sliding glass doors with or without fixed panels. These top hung systems require no bottom track and the smooth sliding action allows for finger touch control.

The upper clamp and roller assemblies offer 6mm of height adjustment during installation to allow for openings and floors that are not true and level. Kits come with concealed roller stops in the top track to hold the door in the open or closed position, a small bottom guide, and are available in a satin anodised finish with an option for powder paint or cladding in any architectural finish desired.

CRL50 Systems are also available with optional 'synchronization' of bi-parting doors where the operation of one panel moves the others. A 'telescoping' option is also available where the panels slide in the same direction and stack away together. You can also enjoy the best of both with our combination 'synchronized' and 'telescoping' options all in one.

Contact technical sales for commercial products for assistance with proper kit selection or installation instruction assistance.

NOTE: Laminated glass should not be used with the CRL50 System.



CRL Sliding Door Systems Brochure

For further information on our sliding door systems please see our sliding door brochure SDS12UK

CRL Laguna Series Sliding Glass Door System with Anti-Lift Safety Features



Typical Wall Mount Installation

- New anti-lift features for added safety
- All 316 alloy brushed stainless steel construction
- Ideal for interior applications
- For use with 10 or 12mm glass
- Comes with all fasteners needed for either flush (countersunk) or surface (straight hole) mounting
- Custom adaptor kits available for wood door applications

We have upgraded our popular Laguna Series Sliding Glass Door System to now include a new 'anti-lift' feature. Through a combination of additions and very subtle changes, we have improved the performance, safety, and security while still offering a clean, simple look. The Laguna Series Sliding Glass Door System can be installed on glass partitions or directly to the side of a sufficiently reinforced wall. The adjustable Top Rollers make final adjustments quick and easy, without the need to remove the door. Their smooth operation and solid stainless steel construction minimizes maintenance issues.

CRL provides you with all the glass attachment fasteners for either flush mounting, requiring a countersunk hole, or surface mounting, requiring a straight hole. The glass attachment fasteners accommodate either 10 or 12mm toughened glass.

NOTE: Laminated glass cannot be used in these systems.

CODE / Description

LSWM3BS Single Sliding Door Wall Mount Installation

LSWM4BS Double Sliding Door Wall Mount Installation

LSGM3BS Single Sliding Glass Mount Installation Assembly

LSGM4BS Single Sliding Door with Sidelites Glass Mount Installation Assembly





CRL Overhead Track Half Panel Bi-Fold Door System



- With 101.6mm square DR4S series door rails
- Panels hung from mid-point, maximizing panel width
- Available in six architectural finishes

CRL Overhead Track Half Panel Bi-Fold Door Systems are available in four configurations, with a maximum of three panels on each side of the opening.

The end panels act like normal centre pivoting doors and connect to the first hanging panel using special hinged end caps. The hanging panels are joined in the same manner, and are hung from a single Cat. No. 0TCA Carriage Assembly at the midpoint of the panel's width.

Use of our Cat. No. 0TBR Series Guide Channel supplied with each order is highly recommended to prevent the panels from dragging during operation.

Maximum panel weight not to exceed 77kg.


Maximum panel width is 1041mm.

Minimum panel width is 381mm.

NOTE: Available with 101.6mm square rails, and by custom order only.



CODE

DESCRIPTION




OTC2XX

Half Leaf Bi-Fold 2 Panels




OTC3XX

Half Leaf Bi-Fold 3 Panels




OTC4XX

Half Leaf Bi-Fold 4 Panels Bipart



OTC6XX

Half Leaf Bi-Fold 6 Panels Bipart



CRL Overhead Track Full Panel Bi-Fold Door System



- With 101.6mm square DR4S series door rails
- Panels hung from end point, minimizing obstruction
- Custom built to your specs for fit and finish

CRL Overhead Track Full Panel Bi-Fold Door Systems are available in four configurations, with a maximum of three panels on each side of the opening. The end panels act like normal centre pivoting doors and connect to the first hanging panel using special hinged end caps. The hanging panels are joined in the same manner, and are hung from a single Cat. No. 0TCA Carriage Assembly at the panel's end point.

Use of our Cat. No. 0TBR Series Guide Channel supplied with each order is highly recommended to prevent the panels from dragging during operation.

Maximum panel weight not to exceed 77kg.

Maximum panel width is 990mm.

Minimum panel width is 381mm.



NOTE: Available with 101.6mm square rails, and by custom order only.

CODE

DESCRIPTION


OTB2XX

Full Leaf Bi-Fold 2 Panels




OTB3XX

Full Leaf Bi-Fold 3 Panels




OTB4XX


Full Leaf Bi-Fold 4 Panels Bipart



OTB6XX

Full Leaf Bi-Fold 6 Panels Bipart



A photograph of a modern office interior featuring glass partitioning systems. The space is bright and open, with large windows on the left side. In the foreground, there is a grey carpeted area. To the right, a glass-walled meeting room is visible, containing a glass table and black chairs. The ceiling is white with recessed lighting. The overall design is clean and professional.







Partitioning Systems







For more information call FREE on

00 800 0421 6144

e: CRL@crlaurence.co.uk f: 00 800 0262 3299



CODE	DESCRIPTION
 <p>SCSA3812SL Satin Anodised 41.3 x 17.5mm</p> <p>SCBS3812SL Brushed Stainless 41.3 x 17.5mm</p>	<p>CRL Shallow U-Channel with Top Load Roll-in Glazing Gasket</p> <ul style="list-style-type: none"> • Uses top loading roll-in glazing gasket for 10 and 12mm glass • Gasket included for 12mm glass • Ideal for recessed 'all-glass' installations • Ready-to-ship models from CRL inventory • Nine standard architectural finishes - see crlaurence.co.uk • Custom finishes and powder painting available • 3m length - custom lengths available
 <p>UCSA3812SL Satin Anodised 41.3 x 41.3mm</p> <p>UCBS3812SL Brushed Stainless 41.3 x 41.3mm</p>	<p>CRL Regular U-Channel with Top Load Roll-In Glazing Gasket</p> <ul style="list-style-type: none"> • Uses top loading roll-in glazing gasket for 10 and 12mm glass • Gasket included for 12mm glass • Ideal for ceiling or floor installations • Ready-to-ship models from CRL inventory • Nine standard architectural finishes - see crlaurence.co.uk • Custom finishes and powder painting available • 3m length - custom lengths available
 <p>WU3SASL Satin Anodised</p> <p>WU3BSASL Brushed Stainless</p> <p>WU3BASL Brite Anodised</p>	<p>CRL Shallow 25mm Wet/Dry Glaze U-Channel</p> <ul style="list-style-type: none"> • Shallow 25.4mm height • Available in 3m or 6m stock lengths • Typically used at the bottom of glass panels • Use with silicone (wet) or glazing gasket (dry) for 10 and 12mm glass • Matching end caps sold separately
 <p>WU1SASL Satin Anodised</p> <p>WU1BSASL Brushed Stainless</p> <p>WU1BASL Brite Anodised</p>	<p>CRL Deep 38mm Wet/Dry Glaze U-Channel</p> <ul style="list-style-type: none"> • Deep 38mm height • Available in 3m or 6m stock lengths • Typically used at the bottom of glass panels • Use with silicone (wet) or glazing gasket (dry) for 10 and 12mm glass • Matching end caps sold separately
 <p>WU2SASL Satin Anodised</p> <p>WU2BSASL Brushed Stainless</p> <p>WU2BASL Brite Anodised</p>	<p>CRL Deep 51mm Wet/Dry Glaze U-Channel</p> <ul style="list-style-type: none"> • Deep 51mm height • Available in 3m or 6m stock lengths • Typically used at the bottom of glass panels • Use with silicone (wet) or glazing gasket (dry) for 10 and 12mm glass • Matching end caps sold separately
 <p>SDCR12BA Brite Anodised</p> <p>SDCR38BA Brite Anodised 10mm Glass</p>	<p>Fixed Panel Regular U-Channel</p> <ul style="list-style-type: none"> • 10mm low profile • For 12mm thick glass • 2.49m stock length • Available in 6 finishes - see crlaurence.co.uk

CODE	DESCRIPTION
 <p>SDCD38BA Brite Anodised 10mm Glass</p> <p>SDCD12BA Brite Anodised 12mm Glass</p>	<p>Fixed Panel Deep U-Channel</p> <ul style="list-style-type: none"> • 19mm high profile • Available in 2.49m and 3.65m stock lengths • Available in 17 finishes - see crlaurence.co.uk
 <p>SCECSA Satin Anodised</p> <p>SCECBS Brushed Stainless</p>	<p>CRL Shallow U-Channel End Caps</p> <ul style="list-style-type: none"> • Finishes to match our shallow U-Channel
 <p>UCECSA Satin Anodised</p> <p>UCECBS Brushed Stainless</p>	<p>CRL U-Channel End Caps</p> <ul style="list-style-type: none"> • Several finishes to match CRL U-Channel with roll-in top load gasket • For use with "UC3800" series channels • Our CRL end caps with screws are used to finish the installation of CRL U-Channels with roll-in top load gasket.
 <p>WU3ECBA Brite Anodised</p> <p>WU3ECBSA Brushed Stainless</p> <p>WU3ECBA Brite Anodised</p>	<p>CRL End Caps for WU3 Shallow 25mm U-Channel</p> <ul style="list-style-type: none"> • Fits WU3 shallow 25mm wet/dry glaze U-Channels • Easy-to-install with silicone sealant • Fits WU3SASL and WU3SA240 • Finishes off exposed ends • Six standard architectural finishes, with custom finishes available
 <p>WU1ECBA Brite Anodised</p> <p>WU1ECBSA Brushed Stainless</p> <p>WU1ECBA Brite Anodised</p>	<p>CRL End Caps for WU1 Deep 38mm U-Channel</p> <ul style="list-style-type: none"> • Fits WU1 deep 38mm wet/dry glaze U-Channels • Easy-to-install with silicone sealant • Finishes off exposed ends • Six standard architectural finishes, with custom finishes available
 <p>WU2ECBA Brite Anodised</p> <p>WU2ECBSA Brushed Stainless</p> <p>WU2ECBA Brite Anodised</p>	<p>CRL End Caps for WU2 Deep 51mm U-Channel</p> <ul style="list-style-type: none"> • Fits WU2 deep 51mm wet/dry glaze U-Channels • Easy-to-install with silicone sealant • Finishes off exposed ends • Six standard architectural finishes, with custom finishes available

CODE	DESCRIPTION
 <p>SDCEC38CH Chrome 10mm Glass</p> <p>SDCEC12CH Chrome 12mm Glass</p>	<p>U-Channel End Caps</p> <ul style="list-style-type: none"> • For use with U-Channels • Available in 8 finishes - see crlaurence.co.uk
 <p>GG38100 10mm Glass 30m Length Roll</p> <p>GG12100 12mm Glass 30m Length Roll</p>	<p>CRL Roll-In EPDM Gasket</p> <ul style="list-style-type: none"> • Dry glaze push-in top load glazing gasket • This CRL glazing gasket is used to dry glaze 10mm glass in CRL sidelite rails and CRL U-Channel with roll-in top load gasket materials. • For use with SC/UC channels • 152.4mm roll also available - see crlaurence.co.uk
 <p>RG38100 10mm Glass 30m Length Roll</p> <p>RG12100 12mm Glass 30m Length Roll</p>	<p>CRL Roll-In Glazing Gasket</p> <ul style="list-style-type: none"> • Roll-in glazing gasket for 10mm and 12mm glass • Eliminates the need for silicone • Black colour material can be used with all finishes of our wet/dry U-Channel. • 152.4mm roll also available - see crlaurence.co.uk • For use with WU3, WU1, WU2 channel
 <p>SB579</p>	<p>CRL Neoprene Setting Blocks</p> <ul style="list-style-type: none"> • The preferred method for centring and cushioning glass • 80 durometer hardness • Special sizes and hardnesses available
 <p>EZCC10 10mm Standard Glass 10.8 Laminated Glass</p> <p>EZCC12 12mm Standard Glass 12.8 Laminated Glass</p>	<p>CRL Glass Partition Joints</p> <ul style="list-style-type: none"> • For use with standard or laminated glass • A great alternative to silicone to achieve a clear slimline joint between glass panels • Increased UV stability





Spider Fittings & Bolts

For more information call FREE on







00 800 0421 6144

e: CRL@crlaurence.co.uk f: 00 800 0262 3299









CRL[®]
crlaurence.co.uk







CRL Heavy Duty Spider Fittings

CODE	DESCRIPTION
 <p>HRF14BS Brushed Stainless</p> <p>HRF14PS Polished Stainless</p>	<p>CRL Rigid Head Combination Glass Attachment</p> <ul style="list-style-type: none"> • For use with 12 to 27mm toughened glass • The rigid head attachments allow for a secure attachment and minimize the deflection of the glass panels • Typically used only for interior applications • 'Flush' or 'cap' mount
 <p>HSF14BS Brushed Stainless</p> <p>HSF14PS Polished Stainless</p>	<p>CRL Swivel Head Combination Glass Attachment</p> <ul style="list-style-type: none"> • For use with 12 to 27mm toughened glass • The head of the swivel glass attachment can tilt up to 6 degrees in any direction on its ball and socket joint minimising stress applied to the glass • Typically used in conditions where the glass will be subject to live loads • 'Flush' or 'cap' mount
 <p>RRF14RW Rigid Glass Attachment</p> <p>RSF14RW Swivel Glass Attachment</p>	<p>CRL Replacement Gasket Set</p> <ul style="list-style-type: none"> • Replace worn or lost gaskets for Cat. No. HRF14BS and HSF14BS/PS
 <p>HSFEX14BS Exterior Swivel Fastener</p> <p>HS1GF14BS Insulated Glass Fastener</p>	<p>CRL Brushed Stainless Heavy-Duty Fasteners</p> <ul style="list-style-type: none"> • Designed for the "All Glass Look" • HSFEX14BS for use with 12 to 22mm toughened glass • HS1GF14BS for use with 32mm toughened glass
 <p>PMH1BS Brushed Stainless</p> <p>PMH1PS Polished Stainless</p>	<p>CRL Single Arm Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This single arm fitting is used to attach a single glass panel to a structural end post • Comes with a 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMH1LBS Brushed Stainless</p> <p>PMH1LPS Polished Stainless</p>	<p>CRL Single Long Arm Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This long arm fitting is used to attach a single glass panel to structural end post and match over "V" fitting arms • Comes with 16 x 99.5mm stainless steel threaded stud and matching nuts with washers.







CRL Heavy Duty Spider Fittings

CODE	DESCRIPTION
 <p>PMH2BS Brushed Stainless</p> <p>PMH2PS Polished Stainless</p>	<p>CRL Double Arm Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This double arm fitting is used to attach two inline glass panels to a structural centre post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMH2VBS Brushed Stainless</p> <p>PMH2VPS Polished Stainless</p>	<p>CRL Double Arm "V" Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This post mount fitting is used to attach a single glass panel to a structural end post, or two inline glass panels to a structural centre post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMH3BS Brushed Stainless</p> <p>PMH3PS Polished Stainless</p>	<p>CRL Three Arm Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This three arm fitting is used to attach three inline glass panels to a structural centre post where they abut to a soffit corner • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMH4BS Brushed Stainless</p> <p>PMH4PS Polished Stainless</p>	<p>CRL Four Arm Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This four arm fitting is used to attach two inline glass panels to a structural centre post. • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMH2V90BS Brushed Stainless</p> <p>PMH2V90PS Polished Stainless</p>	<p>CRL Double Arm "V" 90 Degree Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This double arm fitting is used to attach two 90 degree glass panels at the top or bottom of a structural corner post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMH490BS Brushed Stainless</p> <p>PMH490PS Polished Stainless</p>	<p>CRL 4-Way Arm 90 Degree Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to post or column • This four arm fitting is used to attach two 90 degree glass panels in the middle to a structural corner post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers







CRL Heavy Duty Spider Fittings

CODE	DESCRIPTION
 <p>FMH1BS Brushed Stainless</p> <p>FMH1PS Polished Stainless</p>	<p>CRL Single Arm Heavy-Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to wall or structural fin • This fitting is used to attach a single glass panel to a wall or structural fin • Comes with two 10 x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMH2BS Brushed Stainless</p> <p>FMH2PS Polished Stainless</p>	<p>CRL Double Arm Heavy-Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to wall or structural fin • Use this double arm fitting to attach two inline glass panels to a structural fin • Comes with two 10 x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMH1LHBS Brushed Stainless</p> <p>FMH1LHPS Polished Stainless</p>	<p>CRL L.H. Single Arm Heavy-Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to wall or structural fin • This Fitting is used to attach a single glass panel to a wall or structural glass fin • Comes with two 10 x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMH1RHBS Brushed Stainless</p> <p>FMH1RHPS Polished Stainless</p>	<p>CRL R.H. Single Arm Heavy-Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to wall or structural fin • This fitting is used to attach a single glass panel to a wall or structural glass fin. • Comes with two 10 x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMH2VBS Brushed Stainless</p> <p>FMH2VPS Polished Stainless</p>	<p>CRL Double Arm "V" Heavy-Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to wall or structural fin • This fitting is used to attach a single glass panel to a wall or structural glass fin. • Comes with two 10 x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMH4BS Brushed Stainless</p> <p>FMH4PS Polished Stainless</p>	<p>CRL Four Arm "V" Heavy-Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 27mm • Complete with hardware to mount to wall or structural fin • Use this four arm fitting to attach two inline glass panels to a structural centre fin • Comes with two 10 x 59mm stainless steel threaded studs and two matching cap nuts with washers







CRL Regular Spider Fittings

CODE	DESCRIPTION
 <p>RRF10BS Brushed Stainless</p> <p>RRF10PS Polished Stainless</p>	<p>CRL Rigid Head Combination Glass Attachment</p> <ul style="list-style-type: none"> • For use with 10 to 12mm toughened glass • The rigid head attachments allow for a secure attachment and minimize the deflection of the glass panels • Typically used only for interior applications • 'Flush' or 'cap' mount
 <p>RSF10BS Brushed Stainless</p> <p>RSF10PS Polished Stainless</p>	<p>CRL Swivel Head Combination Glass Attachment</p> <ul style="list-style-type: none"> • For use with 10 to 12mm toughened glass • The head of the swivel glass attachment can tilt up to 6 degrees in any direction on its ball and socket joint minimising stress applied to the glass • Typically used in conditions where the glass will be subject to live loads • 'Flush' or 'cap' mount
 <p>RRF10RW Rigid Glass Attachment</p> <p>RSF10RW Swivel Glass Attachment</p>	<p>CRL Replacement Gasket Set</p> <ul style="list-style-type: none"> • Replace worn or lost gaskets for Cat. No. RRF10BS and RRF10PS
 <p>M16SET Post Mounted Stainless Steel</p> <p>M10SETBS Fin Mounted Brushed Stainless</p> <p>M10SETPS Fin Mounted Polished Stainless</p>	<p>CRL Replacement Stud Set</p> <ul style="list-style-type: none"> • For mounting spider fittings to posts • Stud set for fin mounted spider fittings • Two finishes available
 <p>PMR1BS Brushed Stainless</p> <p>PMR1PS Polished Stainless</p>	<p>CRL Single Arm Regular Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This single arm fitting is used to attach a single glass panel to a structural end post • Comes with a 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMR1LBS Brushed Stainless</p> <p>PMR1LPS Polished Stainless</p>	<p>CRL Single Long Arm Regular Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This long arm fitting is used to attach a single glass panel to structural end post and match over "V" fitting arms • Comes with 16 x 99.5mm stainless steel threaded stud and matching nuts with washers.

CRL Regular Spider Fittings

CODE	DESCRIPTION
 <p>PMR2BS Brushed Stainless</p> <p>PMR2PS Polished Stainless</p>	<p>CRL Double Arm Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This double arm fitting is used to attach two inline glass panels to a structural centre post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMR2VBS Brushed Stainless</p> <p>PMR2VPS Polished Stainless</p>	<p>CRL Double Arm "V" Heavy-Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This post mount fitting is used to attach a single glass panel to a structural end post, or two inline glass panels to a structural centre post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMR3BS Brushed Stainless</p> <p>PMR3PS Polished Stainless</p>	<p>CRL Three Arm Regular Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This three arm fitting is used to attach three inline glass panels to a structural centre post where they abut to an opening • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMR4BS Brushed Stainless</p> <p>PMR4PS Polished Stainless</p>	<p>CRL Four Arm Regular Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This four arm fitting is used to attach two inline glass panels to a structural centre post. • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMR2V90BS Brushed Stainless</p> <p>PMR2V90PS Polished Stainless</p>	<p>CRL Double Arm "V" 90 Degree Regular Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This double arm fitting is used to attach two 90 degree glass panels at the top or bottom of a structural corner post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers
 <p>PMR490BS Brushed Stainless</p> <p>PMR490PS Polished Stainless</p>	<p>CRL Four Arm 90 Degree Regular Duty Post Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This four arm fitting is used to attach two 90 degree glass panels in the middle to a structural corner post • Comes with 16 x 99.5mm stainless steel threaded stud and three matching nuts with washers

CRL Regular Spider Fittings

CODE	DESCRIPTION
 <p>FMR1BS Brushed Stainless</p> <p>FMR1PS Polished Stainless</p>	<p>CRL Single Arm Regular Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to wall or structural fin • This Fitting is used to attach a single glass panel to a wall or structural fin • Comes with two M10-1.5 x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMR2BS Brushed Stainless</p> <p>FMR2PS Polished Stainless</p>	<p>CRL Double Arm Regular Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This single arm fitting is used to attach a single glass panel to a structural end post • Comes with two M10-1.5 x 59mm stainless steel threaded stud and two matching nuts with washers
 <p>FMR1LHBS Brushed Stainless</p> <p>FMR1LHPS Polished Stainless</p>	<p>CRL L.H. Single Arm Regular Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This fitting is used to attach a single glass panel to a wall or structural glass fin • Comes with two 10mm x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMR1RHBS Brushed Stainless</p> <p>FMR1RHPS Polished Stainless</p>	<p>CRL R.H. Single Arm Regular Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This fitting is used to attach a single glass panel to a wall or structural glass fin • Comes with two 10mm x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMR2VBS Brushed Stainless</p> <p>FMR2VPS Polished Stainless</p>	<p>CRL Double Arm “V” Regular Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • This fitting is used to attach a single glass panel to a wall or structural fin • Comes with two 10mm x 59mm stainless steel threaded studs and two matching cap nuts with washers
 <p>FMR4BS Brushed Stainless</p> <p>FMR4PS Polished Stainless</p>	<p>CRL Four Arm “V” Regular Duty Wall/Fin Mount Fitting</p> <ul style="list-style-type: none"> • For use with glass up to 12mm • Complete with hardware to mount to post or column • Use this four arm fitting to attach two inline glass panels to a structural centre fin • Comes with two 10mm x 59mm stainless steel threaded studs and two matching cap nuts with washers

CODE	DESCRIPTION
 <p>FTF12BS Brushed Stainless 305mm</p> <p>FTF12PS Polished Stainless 305mm</p>	<p>CRL Fin Top/Bottom Shoe Fittings for 19mm Glass</p> <ul style="list-style-type: none"> • Fin Top/Bottom Shoe Fittings are used to connect the glass fins to the structure of the floor or ceiling • Available in fin sizes 305, 406, 508, 610mm, please see crlaurence.co.uk for more details
 <p>FSF12BS Brushed Stainless 305mm</p> <p>FSF12PS Polished Stainless 305mm</p>	<p>CRL Fin Splice Fittings for 19mm Glass</p> <ul style="list-style-type: none"> • Fin Splice Fittings are used to stack multiple pieces of glass to construct extra tall fins used to stabilize the glass facade • Available in fin sizes 305, 406, 508, 610mm, please see crlaurence.co.uk for more details
 <p>FSU12BS Brushed Stainless Fin size: 305 to 508mm</p> <p>FSU12PS Polished Stainless Fin size: 305 to 508mm</p>	<p>CRL Fin Suspension Fittings</p> <ul style="list-style-type: none"> • Fin suspension fittings are used to hang the glass fins from the structure of the ceiling by the fin top/bottom shoe fittings • No glass fabrication required • 610 fin size also available, please see crlaurence.co.uk for more details
 <p>AMS0B112CBS Brushed Stainless Regular Duty</p> <p>AMS0B112CPS Polished Stainless Regular Duty</p>	<p>CRL Spider Fitting Post Adapters (Custom Length)</p> <ul style="list-style-type: none"> • Available for round or flat posts • Custom length to your specifications • Regular duty 38mm diameter • Heavy duty 51mm diameter, please see crlaurence.co.uk for more details
 <p>CBP90BS Brushed Stainless</p> <p>CBP90PS Polished Stainless</p>	<p>CRL 90 Degree Corner Bracket</p> <ul style="list-style-type: none"> • Used to secure glass at 90 degree corners • Supplied with four rigid countersunk glass connecting screws
 <p>CBP135BS Brushed Stainless</p> <p>CBP135PS Brushed Stainless</p>	<p>CRL 135 Degree Corner Bracket</p> <ul style="list-style-type: none"> • Used to secure glass at 135 degree corners • Supplied with four rigid countersunk glass connecting screws

CODE	DESCRIPTION
 <p>CCL2BS Brushed Stainless</p> <p>CCL2PS Polished Stainless</p>	<p>CRL 2-Way Glass / 1-Way Wall Circular Bracket</p> <ul style="list-style-type: none"> Used to link two inline panels of glass to a fin support behind Used to connect one or two inline panels to a fin support, or when split apart they can be used to connect one panel to a wall Supplied with two rigid countersunk glass connecting screws and one fin securing bolt
 <p>CCL4BS Brushed Stainless</p> <p>CCL4PS Polished Stainless</p>	<p>CRL 4-Way Glass / 2-Way Wall Circular Bracket</p> <ul style="list-style-type: none"> Used to link two or four inline panels of glass to a fin support behind Used to connect two or four inline panels to a fin support, or when split apart they can be used to connect one or two panels to a wall Supplied with four rigid countersunk glass connecting screws and two fin securing bolt
 <p>CLB1BS Brushed Stainless</p> <p>CLB1PS Polished Stainless</p>	<p>CRL Link Bracket</p> <ul style="list-style-type: none"> Used to connect two 12mm inline glass panels together to reduce differential deflection Supplied with two glass connecting screws
 <p>M8SBSS Brushed Stainless</p>	<p>CRL Stainless Steel Sex Bolt</p> <ul style="list-style-type: none"> Stainless Steel Sex Bolts are countersunk for use with Cat. No. FTF12, FTF16, FTF20, FTF24, FSF12, FSF16, FSF20, FSF24, and CLB1 fittings and brackets
 <p>WKSP1HD</p>	<p>CRL Adjustable Wrench for Heavy-Duty Spider Fittings</p> <ul style="list-style-type: none"> Fully adjustable with multiple size pins to fit a wide variety of sizes Makes installation of Spider fittings easier Fits CRL brand heavy-duty Spider fittings

	CODE	DESCRIPTION
	EURTV408	CRL Neutral Cure Silicone Sealant <ul style="list-style-type: none"> • Available in clear, black and white
	EU33S	CRL Acetic Cure Silicone Sealant <ul style="list-style-type: none"> • Available in clear, black and white
	95C	CRL 95C Silicone Building Sealant <ul style="list-style-type: none"> • Excellent primerless adhesion to most common construction substrates • $\pm 50\%$ joint width movement • AAMA approved • Long tooling time, all temperature gunning • Available in six colours • 20 year limited warranty
	SSG4000	CRL Black GE® UltraGlaze® Silicone Structural Glazing Sealant <ul style="list-style-type: none"> • High-strength neutral cure sealant for use in structural glazing • Primerless adhesion to most substrates

Want more?

Look out for our quarterly Glass Showcase - packed full of deals and new products.



Order yours from crlaurence.co.uk

	CODE	DESCRIPTION
 <p>CE</p>	S338	CRL Sure-Grip 203mm Vacuum Lifter <ul style="list-style-type: none"> • Greatest lifting capacity of any 203mm pump-activated vacuum lifter • One hand pump and attachment for safety when needed • Built-in vacuum loss indicator • Soft contoured sure-grip handle for comfort • Meets CE conformance with 3.3x safety factor rating • Moulded carrying case • 65kg lifting capacity
 <p>CE</p>	S108	CRL 203mm Pump-Action Vacuum Lifter <ul style="list-style-type: none"> • 203mm diameter pad • Proven reliability throughout the world • Heavy-duty 5mm thick ABS handle resists bending, especially during heavy lifts • Fast, safe attachment to smooth, non-porous flat surfaces • Four extra mounting points make it easy to attach to metal lifting frames, jigs, and our vacuum ratchet tensioning kit • 56kg lifting capacity
 <p>CE</p>	05062P	CRL Double Pad Suction Lifter <ul style="list-style-type: none"> • Two individually operated pads • Lightweight plastic design • 60kg lifting capacity
 <p>CE</p>	05062	CRL Aluminium Double Pad Vacuum Lifter <ul style="list-style-type: none"> • Four models to choose from • Handle design allows easy manoeuvring • Strong, lightweight aluminium
	PSB040	CRL Clear Plastic Setting Blocks <ul style="list-style-type: none"> • Barely visible blocks are great for use in mirror and frameless shower installations • 80±5 durometer hardness • 1mm thick, 6.3mm wide, 51mm long

Call FREE on 00 800 0421 6144
Fax FREE on 00 800 0262 3299



Manchester

Charles Babbage Avenue
Kingsway Business Park,
Rochdale, OL16 4NW, England
Tel: +44 (0) 1706 863 600
Fax: +44 (0) 1706 869 860
www.crlaurence.co.uk



Stuttgart

Boschstrasse 7
D-74360 Ilsfeld
Germany
Tel: +49 (0) 7062 915 93 15
Fax: +49 (0) 7062 915 93 16
www.crlaurence.de



Copenhagen

Stamholmen 70 Unit B,
DK-2650 Hvidovre
Denmark
Tel: +45 36 72 09 00
Fax: +45 36 70 33 35
www.crlaurence.dk



France

Boschstrasse 7
D-74360 Ilsfeld
Germany
Tel: +49 (0) 7062 915 93 15
Fax: +49 (0) 7062 915 93 16
www.crlaurence.fr



View Our Full Range of
Architectural Railing Systems...

Our EUHR11 Architectural Balustrade and Railing
Systems Catalogue

- Glass Railings/Balustrades
- TAPER-LOC® Railing System
- Swinging Gate Systems
- Post Railing Systems
- Welded Railing Systems
- Hand Railing Systems
- Aluminium Railing Systems
- Glass Walls/Windcreens
- Tools/Accessories

You may also be interested in...

EUAH11 Architectural Hardware
'All Glass' Entrance Systems Catalogue

- Architectural Metals
- Door and Sidelite Rails
- Door Closers
- Centre Locks
- Glass Clamps
- Headers and Channels
- Ladder Pulls
- Locking Hardware
- Door Closers and Hinges
- Patch Hardware
- Pivot Door Systems
- Push/Pull Handles
- Sliding and Stacking Glass Door Systems
- Spider Fittings
- Standoff Systems

Catalogues are available to download
or view online at crlaurence.co.uk
or crlaurence.de