


Shower Door Hardware

CRL - the world's largest supplier of Frameless Shower products

Create your perfect bathroom with our extensive range of Shower Hardware and accessories.

Shower Door Hardware

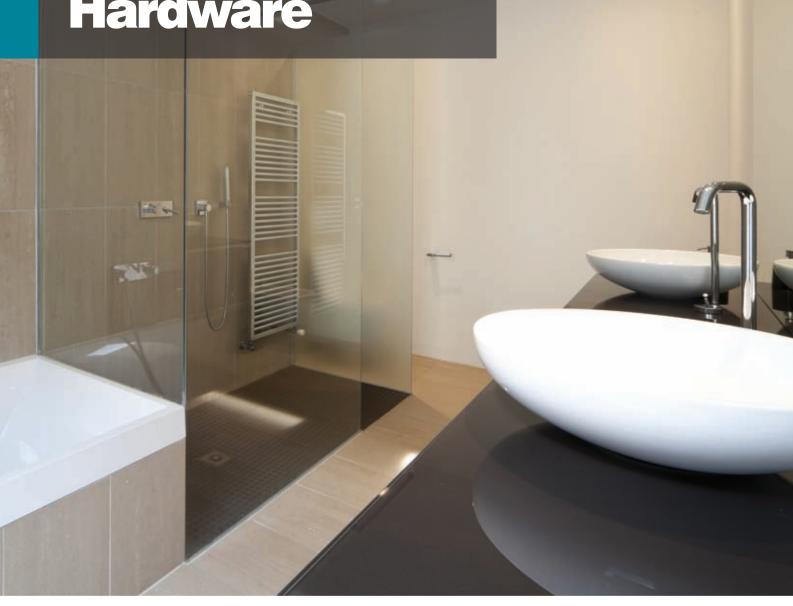











Inside this brochure you will find a selection of our best selling shower door products taken from our full, industry leading range.

From complete systems such as the popular CRL Hydroslide Sliding Shower Door Kit and the new CRL Serenity Series Sliding Door System, to accessories such as Hinges, Handles, Door Knobs, Channels and Clamps, CRL offers the complete package of quality hardware and accessories.


CRL offers the largest variety of Frameless Shower Door Hardware in the glass industry.

Hinges 04-15 Sliding Shower Door Kits 16-18 U-Channels 19 Glass Door Clamps 22-24 Pull Handles & Knobs 25 Support Bars & Headers 28-32 Glass Door Locks 33 Towel Bars 34-35 Shower Door Seals 36-37 Shower Hardware & Accessories 38-39 Colour Range Back Cover Flap



For more information call FREE on **00 800 0421 6144** e: CRL@crlaurence.co.uk f: 00 800 0262 3299

CRL Geneva Series

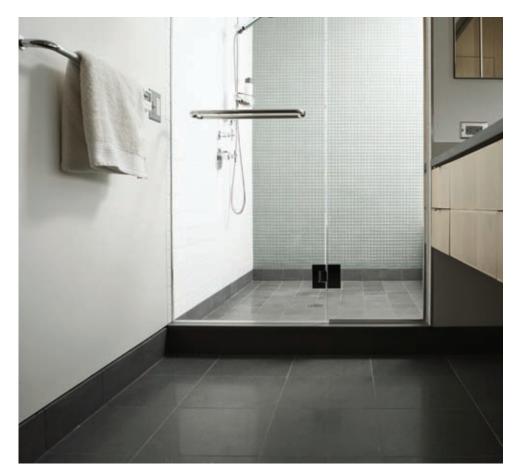

Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

Special Feature: Offers choice of Standard Model factory set at standard closing position 0° , or 5° Pre-Set Model for tighter closure into shower interior

Construction: Solid Brass

Hinge Swings: 90° in and 90° out

Closing Type: Self-centreing when within 15° of closed position.

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

Standard: DIN EN14428

For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**



View

Cat No. / Description

Cat. No. GEN037XX Wall Mount Full Back Plate Standard Model (Factory set for standard closing position)

Cat. No. GEN537XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. GEN074XX Wall Mount Short Back Plate Standard Model

Cat. No. GEN574XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. GEN045XX 135° Glass-to-Glass Standard Model (Factory set for standard closing position)

Cat. No. GEN545XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. GEN044XX Wall Mount Offset Back Plate (Factory set for standard closing position)

Cat. No. GEN544XX Wall Mount Offset Back Plate (Factory set for standard closing position)

Pivot Pin See crlaurence.co.uk for more Pivot Pin information



Custom Pivot Pin Cat. No. G1EP1N





Cat. No. GEN092XX 90° Glass-to-Glass



Cat. No. GEN180XX 180° Glass-to-Glass Standard Model (Factory set for standard closing position)

Cat. No. GEN580XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)

CRL Adjustable Geneva Series



Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

Special Feature: Adjustable to Any Angle Up to 90° Without Having to Take Door Down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

Standard: DIN EN14428

NOTE: Door Glass width may require alteration from standard clearance deductions when adjusting angles. Call for details.

For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk



Cat. No. GEN337XX adjustable Offset Back Plate adjustable Cat. No. GEN380XX

Rear View



Cat No. / Description



Cat. No. GEN344XX Adjustable Chrome Wall Mount

Cat. No. GEN345XX Adjustable 135° Glass-to-Glass





Front View





CRL Jamb Mounted Hinge Kits



Our Jamb Mounted Hinge Kits let you provide an 'all-glass' look shower door in an easy-to-install configuration. Water leakage around the door is minimised with the use of extruded aluminum jambs with vinyl for both the hinge and strike sides, and a clear vinyl sweep for the bottom. Kits come in your choice of three of our most popular finishes, with glass cut-out templates and installation instructions enclosed.

STANDARD HINGE KITS

For 8mm to 12mm Toughened Safety Glass

| 1.83m High Geneva Series Kits | GEN03372XX |
|---------------------------------|------------|
| 1.98m High Geneva Series Kits | GEN03378XX |
| 1.83m High Pinnacle Series Kits | P1N03372XX |
| 1.98m High Pinnacle Series Kits | P1N03378XX |
| HEAVY DUTY HINGE KITS | |

For 10mm to 12mm Toughened Safety Glass. 1.83m High Vienna Series Kits

V1E03372XX

CRL Vienna Series



Suitable for heavier glass

Specifications

Glass Thickness: 10mm to 12mm Toughened Safety Glass Construction: Solid Brass Hinge Swings: 90° in and 90° out Closing Type: Self-centreing when within 15° of closed position Cut-Out Required Includes: Gaskets, Screws, and Glass Fabrication Dimensions Standard: DIN EN14428 For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**



View

Cat No. / Description

Cat. No. V1E037XX Wall Mount Full Back Plate

Cat. No. V1E537XX 5° Pre-Set Model

Cat. No. V1E044XX

Cat. No. V1E544XX

5° Pre-Set Model

Standard Model (Factory set for standard closing position)

(Factory set for 5° tighter closure into shower interior)

Wall Mount Offset Back Plate Standard Model (Factory set for standard closing position)

(Factory set for 5° tighter closure into shower interior)

View

Cat No. / Description

Cat. No. V1E074XX Wall Mount Short Back Plate

Cat. No. V1E180XX 180° Glass-to-Glass Standard Model (Factory set for standard closing position) Cat. No. V1E580XX

5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. V1E045XX 135° Glass-to-Glass



Cat. No. V1E092XX 90° Glass-to-Glass

Internal View of Vienna Hinge

Pin In Place (For "Mouse Ears" Cut-Out)

Pin Removed (For Square Corner Cut-Out)

Pivot Pin See crlaurence.co.uk for more Pivot Pin information



Custom Pivot Pin Cat. No. V1EP1N

CRL Adjustable Vienna Series



Specifications

Glass Thickness: 10mm to 12mm Toughened Safety Glass

Special Feature: Adjustable to Any Angle Up to 90 Degrees Without Having to Take Door Down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

Standard: DIN EN14428

NOTE: Door Glass Width May Require Alteration From Standard Clearance Deductions When Adjusting Angles. Call for Details.

For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Cat No. / Description

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**



Front View

Rear View





CRL Pinnacle Series



Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

Special Feature: Wall Mount Hinges and 180° Glass-to-Glass Hinge offer a choice of a Standard Model, factory set at standard closing position (0°), or a 5° Pre-Set Model for tighter closure into shower interior

Construction: Solid Brass

Hinge Swings: 90° in and 90° out

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

Standard: DIN FN14428 For maximum weight and door width

capacities please see crlaurence.co.uk

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk



View

Cat No. / Description

Cat. No. P1N037XX Wall Mount Full Back Plate Standard Model (Factory set for standard closing position)

Cat. No. P1N537XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. P1N074XX Wall Mount Short Back Plate Standard Model (Factory set for standard closing position)

Cat. No. P1N574XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



View

Cat No. / Description

Cat. No. P1N180XX 180° Glass-to-Glass Standard Model (Factory set for standard closing position)

Cat. No. P1N580XX $5^\circ\,\text{Pre-Set}$ Model (Factory set for 5° tighter closure into shower interior)



Cat. No. P1N045XX 135° Glass-to-Glass

Cat. No. P1N092XX 90° Glass-to-Glass


Cat. No. P1N044XX Wall Mount Offset Back Plate Standard Model (Factory set for standard closing position) Cat. No. P1N544XX

 $5^{\rm o}$ Pre-Set Model (Factory set for 5° tighter closure into shower interior)

Pivot Pin See crlaurence.co.uk for more Pivot Pin information







CRL Adjustable Pinnacle Series



Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

 $\ensuremath{\text{Special Feature:}}$ Adjustable to any angle up to 90° without having to take door down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

Standard: DIN EN14428

NOTE: Door Glass width may require alteration from standard clearance deductions when adjusting angles. Call for details.

For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**





CRL Cologne Series



Suitable for heavier glass

Specifications

Glass Thickness: 10mm to 12mm Toughened Safety Glass Construction: Solid Brass Hinge Swings: 90° in and 90° out Closing Type: Self-centreing when within 15° of closed position **Cut-Out Required** Includes: Gaskets, Screws, and Glass Fabrication Dimensions Standard: DIN EN14428 For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Chrome version shown below. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk



View

Cat No. / Description

Cat. No. C0L037XX Wall Mount Full Back Plate Standard Model

Cat. No. C0L537XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. C0L180XX

180° Glass-to-Glass

Cat No. / Description



Cat. No. C0L044XX Wall Mount Offset Back Plate Standard Model (Factory set for standard closing position)

Cat. No. C0L544XX 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. C0L045XX 135° Glass-to-Glass

Cat. No. C0L092XX 90° Glass-to-Glass



Internal View of Cologne Hinge

Pin In Place (For "Mouse Ears" Cut-Out)

Pin Removed (For Square Corner Cut-Out)





Pivot Pin

CRL Adjustable Cologne Series



Specifications

Glass Thickness: 10mm to 12mm Toughened Safety Glass

Special Feature: Adjustable to any angle up to 90° without having to take door down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

Standard: DIN EN14428

NOTE: Door Glass width may require alteration from standard clearance deductions when adjusting angles. Call for details.

For maximum weight and door width capacities please see crlaurence.co.uk


Colours

Chrome version shown below. 17 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**



Front View


Rear View

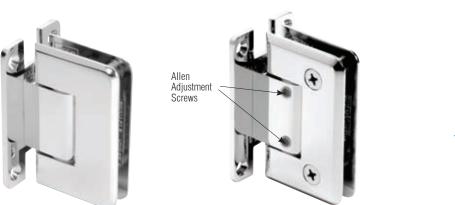

Cat. No. COL337XX Adjustable Wall Mount Full Back Plate



Cat No. / Description

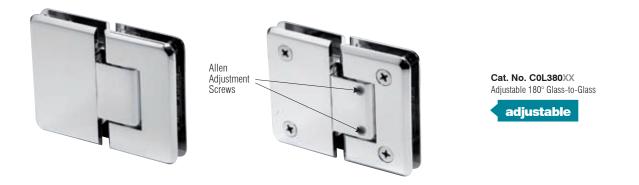

CRL Madrid Series Hinge / Clamp



View

For 10mm and 12mm glass

Cat No. / Description

Cat. No. MA06RHXX Right Hand For 10mm door and 12mm fixed panel



Cat. No. MA07RHXX Right Hand For 8mm door and 10mm fixed panel

IMPORTANT ORDERING TIPS:

The MA06 and MA07 Hinge Sets are supplied complete with two Hinge/Clamps. When an order is placed for either the MA06 or MA07, one Hinge/Clamp for the top and one Hinge/Clamp for the bottom will be provided. The Hinge Sets are ordered as "Left Hand" or "Right Hand", as viewed from the outside of the shower. As an example, an MA06L is a set of both top and bottom hinges mounted to the left side of a door, when viewed from the outside of the shower. An MA06R is a set of both top and bottom hinges mounted to the right side of a door, when viewed from the outside of the shower.

Gaskets Cat. No. RG38100 For 10mm fixed panel

Cat. No. RG12100 For 12mm fixed panel

Specifications

Glass Thickness: 8mm to 10mm Fixed Toughened Safety Glass 10mm to 12mm Door Toughened Safety Glass Construction: Solid Brass

Hinge Swings: Out only

Closing Type: Tight Closure to Strike Jamb (Not Supplied)

No Cut-Out for Door; Fabrication Required for Fixed Panel Being Hinged From

Includes: Gaskets and Mounting Hardware This Hinge Series is Patented (Patent Number 7,607,199)

For maximum weight and door width capacities please see crlaurence.co.uk

*Mandatory use of 25 or 38mm heavy weight wall Dry Glaze U-Channel and Vinyl.

Colours


Chrome version shown below. 5 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**




For 10mm and 12mm glass

View







For 10mm door and 12mm fixed panel

Cat No. / Description

Cat. No. MA06LHXX

Right Hand

Cat. No. MA07LHXX Right Hand For 8mm door and 10mm fixed panel

Cat. No. WU3SASL* Satin Anodised 25mm Deep Dry Glaze U-Channel

(Also available in Brite Anodised, Brite Gold Anodised, Brushed Nickel Anodised and Painted Oil Rubbed Bronze finishes)

Cat. No. WU1SASL* Satin Anodised 38mm Shallow Dry Glaze U-Channel

(Also available in Brite Anodised, Brite Gold Anodised, Brushed Nickel Anodised and Painted Oil Rubbed Bronze finishes)

CRL Grande Series



Specifications

Glass Thickness: 8 to 10mm Toughened Safety Glass

Special Feature: Have ability to be side mounted at top and bottom corners of the door, or anywhere in-between. Corner mounting allows more glass exposure Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Precise closing to 0 Degrees. Cut-Out and Hole Required

Includes: One Hinge, Gaskets, Screws and Template

Standard: DIN EN14428

For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Chrome version shown below. 8 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk



| View | Cat No. / Description | View | Cat No. / Description |
|------|---|------|--|
| | Cat. No. GRA037XX Grande Wall Mount Standard Back Plate Hinge | | Ilen Adjustment crews Cat. No. GRA337XX Adjustable Standard Wall Mount Grande Series Hinge adjustable |
| - | Cat. No. GRA044XX Grande Wall Mount Offset Back Plate Hinge | L | Cat. No. GRA344XX Adjustable Offset Wall Mount Grande Series Hinge adjustable |
| | Cat. No. GRA090XX Grande 90 Degree Glass-to-Glass Hinge | | Cat. No. GRA390XX Adjustable 90 Degree Glass-to-Glass Grande Series Hinge adjustable |
| | Cat. No. GRA180XX Grande 180 Degree Glass-to-Glass Hinge 135 Degree Glass-to-Glass Hinge also available (GRA135XX) | | Cat. No. GRA380XX Adjustable 180 Degree Glass-to-Glass Grande Series Hinge adjustable |

CRL Prima Series



Specifications

Glass Thickness: 8mm to 10mm Toughened Safety Glass

Special Feature: Top and Bottom Mount design allows more glass to show. Use of these hinges reduce quantity of cut-outs required when compared to standard side mount glass-to-glass hinges. Cat. No. PPH01 can be mounted floor and ceiling, or floor and header Construction: Solid Brass

Hinge Swings: Full Rotation

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

This hinge series is patented (Patent Number 5297313)

For maximum weight and door width capacities please see crlaurence.co.uk

Pivot Pin Available See crlaurence.co.uk for

more information

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**







Cat. No. PPH02XX Glass-to-Fixed Transom Mount



Cat. No. PPH05LXX Offset Bracket Wall Mount Left Hand Mount when viewed from outside of shower

Cat. No. PPH05RXX Offset Bracket Wall Mount Right Hand Mount when viewed from outside of shower



Cat. No. PPH07XX Top or Bottom Mount with Attached U-Clamp



adjustable

Cat. No. PPH301XX CRL Chrome Adjustable Prima Series Hinge

CRL Junior & Senior Prima Series



Specifications

Glass Thickness: Prima Senior -12mm Toughened Safety Glass

Glass Thickness: Prima Junior -6mm Toughened Safety Glass

Junior Prima Special Feature: Top and bottom mount allows more glass exposure. Can also save on glass fabrication costs when compared to use of Side Mount Glass-to-Glass Hinges requiring more cut-outs.

Construction: Solid Brass

Hinge Swings: Full Rotation

Closing Type: Self-centreing when within $15^{\rm o}$ of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions. Adjustable Prima also includes 3mm Allen Wrench.

For maximum weight and door width capacities please see crlaurence.co.uk

Pivot Pin Available See crlaurence.co.uk for

more information

Colours

Chrome version shown below. 5 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**



View

Cat No. / Description

PRIMA SENIOR

Cat. No. SRPPH01XX

Top or Bottom Mount



PRIMA SENIOR Cat. No. SRPPH02XX Glass-to-Glass Mount



View

PRIMA JUNIOR Cat. No. JRPPH01XX Top or Bottom Mount


Cat No. / Description



For 6mm glass

PRIMA JUNIOR Cat. No. JRPPH02XX Glass-to-Fixed Transom Mount

Flush Mount



Cat. No. R1V180LCH 180º Glass-to-Glass

Cat. No. R1V180RCH 180º Glass-to-Glass

Cat. No. R1V90LCH 90° Glass-to-Glass

Matching Glass Clamps available see page 23

CRL Riviera Hinges

Specifications

Glass Thickness: 8mm and 10mm Toughened Safety Glass Special Feature: Flush mount in the inside of the panel and door Door and fixed panel can adjust vertically up to 10mm Hinge Swings: Door opens outwards 170 degrees only Closing Type: Self closing from 25° of closed position Cut-Out: Required for fixed panel and door

For maximum weight and door width capacities please see crlaurence.co.uk

Colours

Chrome finish only

CRL Serenity Series Sliding Door System



Specifications

Glass Thickness: 8mm or 10mm Toughened Safety Glass

Construction: Stainless steel

Maximum Door Weight: Do not exceed either 762mm wide or 40kg

Fabrication: Holes required in both door and fixed panel (see crlaurence.co.uk)

Colours

Polished Stainless (PS) shown below, also available in Brushed Stainless (BS). For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**



View



Cat No. / Description

Cat. No. SERF2XX

Standard 180 Degree Kit Includes:

- 1 2m length header support bar
- 2 Rollers 2 - Stoppers
- 2 Anti-lift fittings
- 2 Track holder fittings for wall
- 2 Track holder fittings for fixed panel
- 1 Thru-glass pull
- 1 Door guide



Cat. No. SER90XX Accessory kit for 90 degree return Connects to wall fitting for 90 degree installations

CRL Hydroslide Sliding Shower Door Kits



Specifications

Glass Thickness: 8mm or 10mm Toughened Safety Glass

Construction: Plated or Lacquered Solid Brass Fittings; Anodised Aluminium Sliding Door Track

Maximum Door Weight: 40kg

Includes: Gaskets, Screws, and Glass Fabrication Information. Complete installation instructions along with glass and metal cutting formula available at **crlaurence.co.uk**

Colours

Chrome (CH) version shown below. 4 attractive colours available, Chrome (CH), Brass (BR), Brushed Nickel (BN), and Oil Rubbed Bronze (ORB). For details please see the flip out chart at the rear of this brochure or visit **crlaurence.co.uk**



View



Cat No. / Description

 Cat. No. HYDK60XX
 180° Standard Kit 1524mm

 Cat. No. HYDK84XX
 180° Standard Kit 2134mm

180° Standard Kit Consists of:

- 1 Sliding Glass Door Upper Track
- 2 Sliding Glass Door Rollers
- 1 Sliding Glass Door Floor Guide
- 1 914mm Half-Round SDT980 Threshold 2 - 180 Degree Glass-to-Sliding Track Connectors
- 1 2489mm DK98L L-Seal for wall

2 - Hangers for Sliding Glass Door

2 - Sliding Glass Door Roller Stops

2 - 90 Degree Wall-to-Upper Track Connectors

NOTE: Bottom Fixed Glass Attachments, Handles or Knobs must be ordered separately.

Cat. No. HYDA9XX

90° Wall-to-Glass Accessory Kit Consists of: 1 - 90 Degree Glass-to-Sliding Track Connector 1 - 90 Degree Wall-to-Glass Bracket

*90 Degree Units require that you order one 180 Degree Standard Kit plus one 90 Degree Accessory Kit

CRL Essence Series Sliding Shower Door System



View



Specifications

Glass Thickness Range: 12mm toughened safety glass (Not included)

Material: Rollers and top guide, constructed of solid brass; bottom sliding track and U-Channel constructed of aluminium; clear plastic L-jamb

Maximum Door Size: Do not exceed either 787mm wide or 50.8 kg

Basic Kit Fabrication: Notch required for bottom rollers, holes required for top guide (see crlaurence.co.uk for details)

Colours

Chrome (CH) version shown below. 4 attractive colours available, Chrome (CH), Brass (BR), Brushed Nickel (BN), and Oil Rubbed Bronze (ORB). For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk







Cat No. / Description

Cat. No. ESS1XX Basic Essence Kit

Basic ESS1 kit includes the following:

- 2 Bottom Rollers
- 1 Top Door Guide
- 1 1.63m Length Bottom Track
- 1 2.49m Length U-Channel 1 2.49m Length Plastic L-Seal
- 1 SDCEC12 End Cap for Channel 1 - M6164 Shower Door Bumper

NOTE: Glass Clamps, Handle or Knob, and Other Accessories Sold Separately.

*90 Degree Units require that you order two each CL90S wall mount brackets, two each CL090 90 degree glass-to-glass brackets, and a basic ESS1 kit in your choice of finish.

CRL U-Channels









STEP 2 / Fix rigid leg vinyl for exterior of shower





View



Features

- Clear vinyl secures glass in channel and eliminate the need for messy silicone
- Recess in bottom channel hides caulk line
- Channel and matching end caps available in several popular finishes

Cat No. / Description

Cat. No. DUC38XX CRL Dry Glaze U-Channel for 10mm Glass only

Cat. No. DUC516XX CRL Dry Glaze U-Channel for 8mm Glass only



- Extremely versatile extrusion in several popular finishes
- Wet glazed with clear silicone to secure glass
- · Popular 2.49m lengths
- Five popular finishes available

Cat. No. SDCD516XX CRL Single U-Channel for 8mm Glass



- Deep pocket for securing fixed panels of glass
- May be used alone or with regular depth U-Channel
- Wet glazed with clear silicone to secure glass
- Popular 2.49m lengths
- Visit crlaurence.co.uk for other available finishes and economical 3.66m stock lengths

Cat. No. SDCD38XX CRL Deep U-Channel for 10mm Glass

Cat. No. SDCD12XX CRL Deep U-Channel for 12mm Glass



Covers Open End of SDCD38 Series U-Channels
Visit crlaurence.co.uk for other available finishes


Cat. No. SDCEC38XX End Cap

Covers Open End of SDCD12 and DUC38 Series U-Channels

• Visit crlaurence.co.uk for other available finishes

Cat. No. SDCEC12XX End Cap



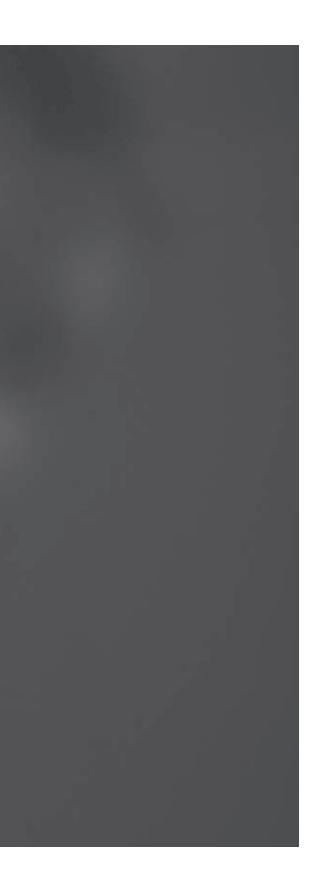

CRL Wall Mount Clamps mount directly to the wall, ceiling or floor to secure vertical fixed glass panels in contemporary shower enclosures. We also offer Glass-to-Glass Clamps that assist in maintaining the frameless appearance and provide a clean looking alternative to a U-Channel.

Our offering has evolved over the years to over 25 series of Glass Clamps in various configurations and beautiful finishes.



CRL Square Style Heavy-Duty Glass Clamps




Specifications

Glass Thickness: 10mm to 12mm Construction: Solid Brass

Glass Fabrication Required: SGCU1 requires notch; other clamps require holes or hole and notch combination

Includes: Mounting Screws and Gaskets Colours: Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

E

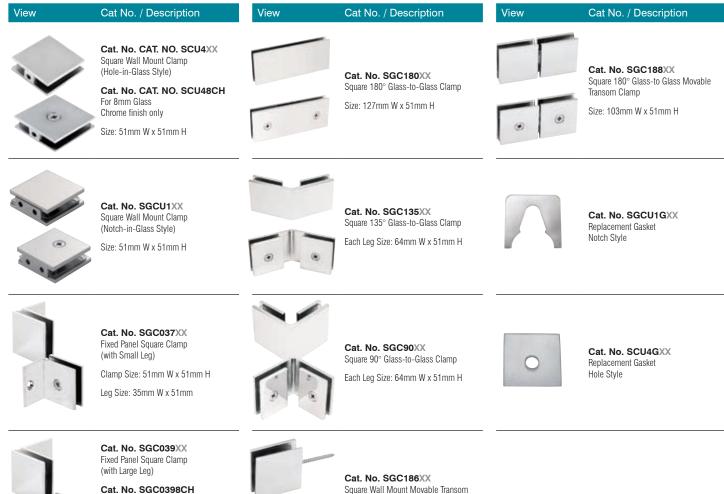

4

Clamp

51mm W x 51mm H

For 8mm Glass

Chrome finish only

Clamp Size: 51mm W x 51mm H

Leg Size: 51mm W x 51mm H

CRL Bevelled Style Heavy-Duty Glass Clamps



Specifications


Glass Thickness: 10mm to 12mm Construction: Solid Brass

Glass Fabrication Required: BGCU1 requires notch; other clamps require holes or hole and notch combinations

Includes: Mounting Screws and Gaskets Colours: Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

E

Leg size: 84mm W x 79mm H

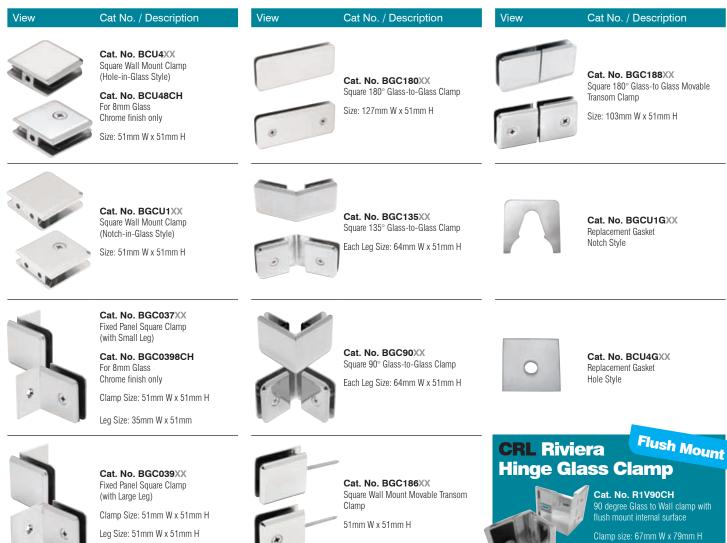

CRL Adjustable Glass Clamps



| Cat No. / | Description |
|-----------|-------------|
| | |

| Cat. No. ADJ037XX Adjustable Wall Mount Clamp |
|--|
| Size: 49mm Wide x 44mm High |
| Glass Thickness Range: 8mm to 12mm |
| Hole Diameter Required: 22mm |
| Includes: Clear Gaskets and Mounting Screw |
| Cat. No. ADJ180XX Adjustable Glass-to-Glass Mount Clamp |

Size: 49mm Wide (each leg) x 44mm High Glass Thickness Range: 8mm to 12mm Hole Diameter Required: 22mm Includes: Clear Gaskets and Mounting Screw





Glass Brackets to match Hinges



Cat No. / Description

To suit: Geneva, Concord, Vienna, Cardiff and Senior Cardiff Range

Cat. No. GE090SXX Glass-to-Glass Bracket Cat. No. GE90SXX

Wall Mount Bracket Matches configuration of the hinges listed above

To suit: Pinnacle, Prima, Senior Prima, Cologne and Estate Range

Cat. No. P1090XX Glass-to-Glass Bracket

Cat. No. P190SXX Wall Mount Bracket

Matches configuration of the hinges listed above

Colours: Chrome version shown opposite. 14 attractive colours available.

For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

Glass Thickness Range: 8 to 12mm Hole Diameter Required: 19mm

Colours: Chrome version shown opposite. 14 attractive colours available.

For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

Glass Thickness Range: 8 to 12mm Hole Diameter Required: 19mm


View





CRL Traditional Style Glass Clamps

View



Cat. No. UC77XX

Cat No. / Description

Traditional Style Fixed Panel U-Clamp

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 16 or 19mm

for 8mm glass

Includes: Mounting Screws (for Wall Clamps) and Clear Gaskets *An additional set of clear gaskets (Cat. No. UCG77) is required



Cat. No. GCB184XX 180 Degree Traditional Style Double Stud Glass-to-Glass Clamp

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 16 or 19mm

Includes: Gaskets. *An additional set of gaskets is required for 8mm glass (Cat. No. GCBG184).



Cat. No. GCB182XX

Cat No. / Description

Cat. No. GCB90XX

mount application.

(Cat. No. UCG77)

180 Degree Traditional Style Split Face and "Y" Inline Glass-to-Glass Clamp

90 Degree Traditional Style Glass-to-Glass Clamp

*An additional set of gaskets is required for 8mm glass

Glass Thickness Range: 8mm to 10mm

Hole Diameter Required: 16 or 19mm

Includes: Gaskets and Wood Screw for wall

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 16 or 19mm

Includes: Gaskets, Screw for "Y" Inline Clamp use. *An additional set of gaskets is required for 8mm glass (Cat. No. UCG77).

CRL Pull Handles and Knobs

View

Cat No. / Description

BM Series Back-to-Back Pull Handles

Cat. No. BM6X6XX 152mm size with metal washers

203mm size with metal washers Material: 19mm Diameter Brass Tubing (1.5mm thick),

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm: 203mm

BM Series Back-to-Back Pull Handles

Cat. No. BMNW6X6XX 152mm size without metal washers

Cat. No. BMNW8X8XX

203mm size without metal washers Material: 19mm Diameter Brass Tubing (1.5mm thick)

Glass Thickness Range: 6mm to 12mm

Centre-to-Centre Hole: 152mm; 203mm

Hole Diameter Required: 12mm

Crescent Style Back-to-Back Pull Handles

Cat. No. CSH6X6XX 152mm

Cat. No. CSH8X8XX 203mm

Material: 19mm Brass Tubing Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm Centre-to-Centre Hole: 152mm; 203mm

SQ Series Square Tubing Mitred Corner **Back-to-Back Pull Handles**

Cat. No. SQ6X6XX 152mm

Cat. No. SQ8X8XX 203mm

Material: 19mm Brass Tubing Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm, 203mm

MT Series Round Tubing Mitred Corner Back-to-Back Pull Handles

Cat. No. MT6X6XX 152mm

Cat. No. MT8X8XX 203mm

Material: 19mm Brass Tubing; 31.75mm Metal Washers Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm, 203mm

RM Series Flat Outside Surface/Round Tubing Inside Back-to-Back Pull Handles Cat. No. RM6X6XX 152mm Cat. No. RM8X8XX 203mm Material: 19mm Brass Tubing


Glass Thickness Range: 6mm to 12mm Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm, 203mm



CRL SDK Series Knobs

Cat. No. SDK106XX 30mm Round Knob Set Material: Solid Brass Material Glass Thickness Range: Fits 6 to 12mm Thick Glass Available in Several Attractive Finishes Hole ø 10 or 12mm



CRL SDK Series Knobs

Cat. No. SDK160XX 30mm Square Knob Set Material: Solid Brass Material Glass Thickness Range: Fits 6 to 12mm Thick Glass Available in Several Attractive Finishes Hole ø 12mm



CRL SDK Series Knobs

Cat. No. SDK140XX 25mm Round Knob Set Material: Solid Brass Material Glass Thickness Range: Fits 6 to 12mm Thick Glass Available in Several Attractive Finishes Hole ø 10 or 12mm

CRL SDK Series Knobs

Cat. No. SDK112XX 19mm Square Knob Set without Plastic Sleeve

Cat. No. SDKP112XX 19mm Square Knob Set with Plastic Sleeve

Material: Solid Brass Material

Glass Thickness Range: Fits 6 to 12mm Thick Glass

Available in Several Attractive Finishes

Hole ø 10 or 12mm

CRL Chrome Back-to-Back Bow-Tie Style Knobs

Cat. No. SDK109XX Back-to-Back Knob

Solid Brass Material

Fits 6 to 12mm Thick Glass

Available in Several Beautiful Finishes

Hole ø 10 or 12mm

Cat. No. LP6X6XX 152mm Handle Cat. No. LP8X8XX 203mm Handle

Mounting Holes / Centre-to-centre 152mm / 203mm Material: 19mm Brass Tubing 152 and 203mm Sizes 32mm Brass Tubing All Other Glass Thickness Range: 8mm to 12mm Hole Diameter Required: For 152 and 203mm Handles: 12mm

25





View





Cat No. / Description

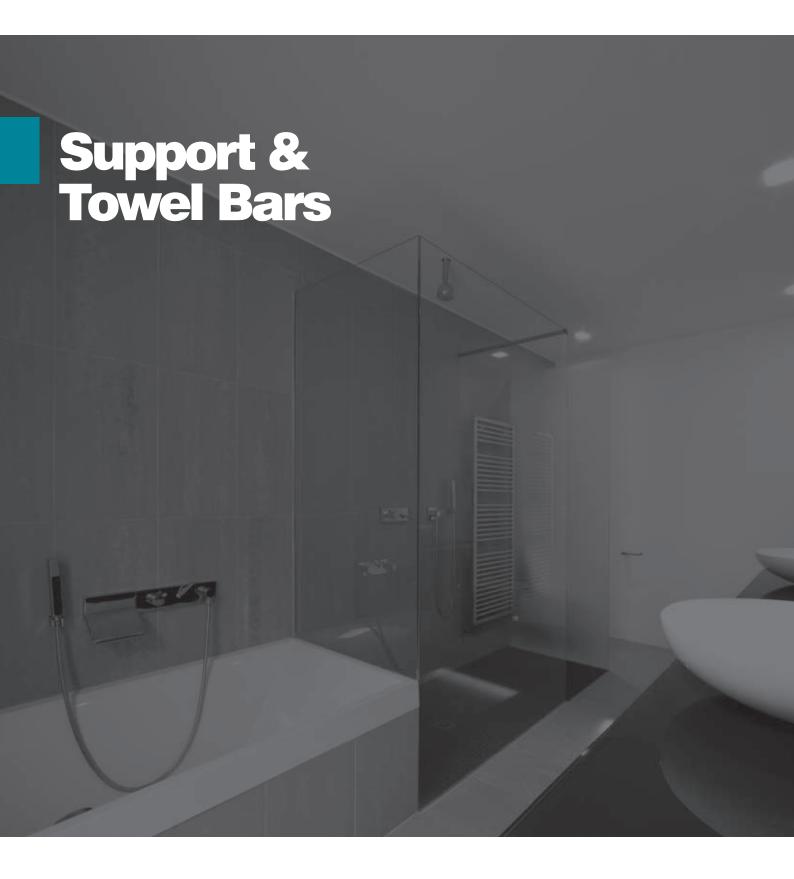

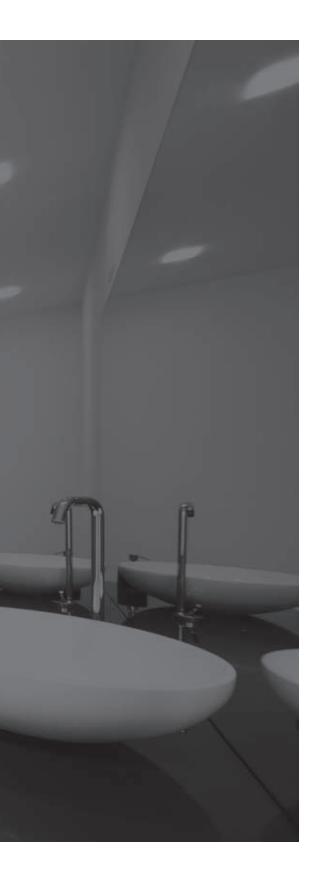

Our range of Support Bars comes in a variety of lengths and finishes, suitable for different glass thicknesses, to enable you to create your perfect bathroom space.

Our range of Towel Bars will add a touch of elegance and class to your bathroom. Constructed of tubular brass, CRL's Towel Bars ensure your door installations will last for a long time as their lightweight properties help to keep the weight of the door hardware to a minimum.

All CRL Frameless Shower Door Hardware has consistent finishes and will instantly add a look of quality to the appearance of your enclosure, and with proper care and cleaning, will remain beautiful for years to come.



CRL Support Bar Fittings

Thru-Glass to Wall Rod



Through-Glass Mounted Support Bar

The Through-Glass Mounted Support Bar creates a means of support that strengthens an enclosure's structural integrity. It may be used in place of a header in certain applications (call for details) and can be mounted to a wall, ceiling or glass-to-glass. Supplied Bar is 991mm long, requires a 16mm hole in the glass, and comes in finishes to match our Hinges and Pull Handles. All mounting hardware included.

| View | Specification | Cat No. / Description |
|------|--|---|
| | Choice of wall/ceiling mount or glass-to-glass mount Helps strengthen structural integrity of shower enclosure Stocked in numerous finishes, with custom finishes available 991mm bar length, 1.08M overall length All mounting hardware included | Cat. No. SUP135XX Wall Mount Cat. No. SUP135G2GXX Glass-to-Glass Mount 16mm ø hole required |

Mitred Support Bar Bracket


The Mitred Support Bar Wall Mount Bracket is designed to attach to the wall by slipping over a screw mounted stud that is secured into the wall. Perfect for an inline panel needing to be secured to an adjacent wall for stability. The Bracket comes in matching finishes, and fits any of our Fixed Panel Support Bars. Mitre of Bracket ensures flush fit against wall.



CRL Support Bars



These Fixed Panel Support Bars stabilize fixed panels of glass in enclosures that do not go all the way up to the ceiling. Bars are available in two lengths, and in sizes to secure 6mm to 12mm thick glass. Finishes are available to match most of our hinges, knobs, and pull handles. No holes or cut-outs are required in the glass.

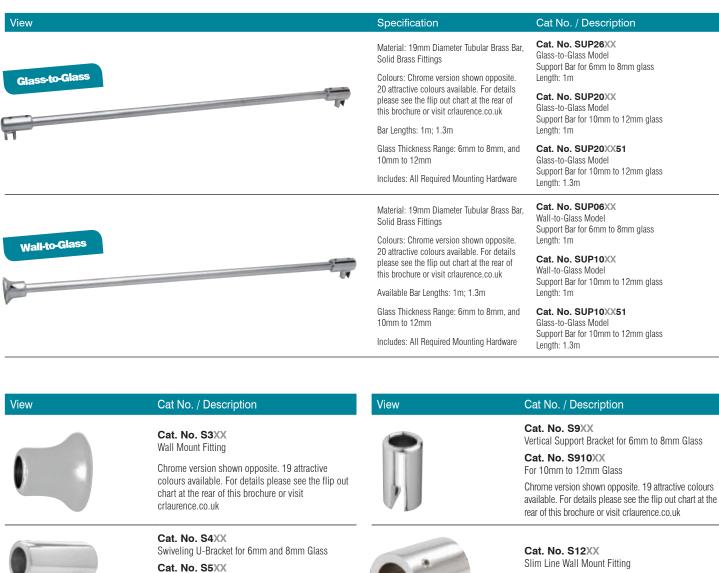

Chrome version shown opposite. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

Cat. No. S13XX Slim Line Glass Mount Fitting for 6mm to 12mm Glass

Chrome version shown opposite. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

1m Bar Only 1.3m Bar Only

Cat. No. S1XX Cat. No. S2XX

2.03m Bar Only

Material: 19mm Diameter Tubular Brass Bar. Available Bar Lengths: 1m; 1.3m; 2.03m.

Chrome version shown opposite. 19 attractive colours available.



Cat. No. S8XX 90° Corner Bracket for Support Bars

Chrome version shown opposite. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

Swiveling U-Bracket for 10mm and 12mm Glass

rear of this brochure or visit crlaurence.co.uk

Movable Bracket for 6mm Glass

Movable Bracket for 10mm Glass

Cat. No. S6XX

Cat. No. S7XX

Chrome version shown opposite. 19 attractive colours

available. For details please see the flip out chart at the

Chrome version shown opposite. 19 attractive colours

available. For details please see the flip out chart at the

rear of this brochure or visit crlaurence.co.uk







Cat. No. S80

CRL Square Support Bar and Accessory Fittings









Specification

Cat No. / Description

Material: 19mm square tubing, solid brass fittings

Chrome version shown. 5 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk

Bar Lengths: 1.5m

New square tubing matches geometry of many popular CRL hinges

Provides fixed panel support for enclosures not going to the ceiling

No hole drilling required in glass

Cat. No. SQ59XX 1.5m Square Bar

.5m Square Bar

Cat No. / Description

View



Cat No. / Description Cat. No. SQ41XX Swiveling U-Bracket for 6 to 8mm

Glass for Square Bar Cat. No. SQ42XX Swiveling U-Bracket for 10 to 12mm



View

Cat. No. SQ47XX

Cat. No. SQ47XX 45° Mitred Wall Mount Bracket for Square Bar



Cat. No. SQ43XX Movable Bracket for 6 to 8mm Glass for Square Bar

Glass for Square Bar



Cat. No. SQ48XX 22.5° Mitred Wall Mount Bracket for Square Bar



Cat. No. SQ44XX Movable Bracket for 10 to 12mm Glass for Square Bar



Cat. No. SQ49XX Adjustable Wall Mount Bracket for Square Bar



Cat. No. SQ45XX Adjustable Corner Bracket for Square Bar



Cat. No. SQ50XX "T" Junction Bracket for Square Bar



Cat. No. SQ46XX Wall Mount Bracket for Square Bar

CRL EZ-Adjust Shower Door Header Kit



Features

- Secures shower enclosure not going to ceiling
- Allows horizontal (side-to-side) adjustment
 of hinge after installation
- No hole drilling required through header for adaptor, if using Prima Hinge model PPH06 or Senior Prima Hinge model SRPPH06
- Constructed of heavy 6063-T5 aluminium alloy
- For use with 8mm, 10mm and 12mm thick glass

Colours

Chrome version shown. 8 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.co.uk






Specification

Each Kit Contains

- 1 2.49m or 3.6m Header Length
- 1 914mm Snap-In Filler Insert for
- Door Pocket • 1 – Deluxe Wall Mount Bracket Kit
- (Two Brackets) • 2.44m or 3.65m of 8mm and 10mm

Clear Vinyl Vinyl not required for 12mm Glass



Cat. No. EHK98XX


Cat No. / Description

2.49m EZ-Adjust Shower Door Header Kit

Cat. No. EHK144XX 3.65m EZ-Adjust Shower Door Header Kit

If using Prima Hinge Model PPH06 or Senior Prima Hinge Model SRPPH06, hinge can be adjusted side-to-side after installation. No drilling required to install hinge into header if using those hinges.

CRL Deluxe Shower Door Header Kit





SDH Series

SQH Series

Each Kit Contains

your choice)

- 1.67m, 2.49m or 3.65m Piece of Header Extrusion
- .91m Piece of Snap-In Filler for Door Pocket
- Vinyl for 8mm and 10mm Glass (not needed
- for 12mm) • Pack of two SHB100 Aluminium Wall Mounting Brackets and pack of two BWB2 Brass Wall Mounting Brackets (use set of

SDH Series Flat/Round Profile Cat. No. SDH660XX

8 to 12mm

1.67m Deluxe Header Kit Cat. No. SDH980XX 2.49m Deluxe Header Kit

Cat. No. SDH144XX 3.65m Deluxe Header Kit

SQH Series Flat/Flat Profile Cat. No. SQH980XX 2.49m Deluxe Header Kit

CRL Frameless Vertical Post System



Specifications

- Stock or custom kits allow user to stabilise fixed panels of glass not going to ceiling
- Excellent alternative to traditional horizontal header systems
- Four popular stock finishes for 8, 10, and 12mm glass
- Glass fabrication required for tube adaptors/ end caps with 19mm holes
- Custom kits available in various finishes, post configurations, and with dome or ball style glue-in end caps (Two-Point System only)



Cat No. / Description

Cat. No. VPK33XX

Two Point Ceiling Mount System Kit

1 Each - 838mm length of 51mm diameter Round Tubing, two Rivet Nuts, and Flat Style End Cap 2 Each - Tube Adaptors with 38mm diameter End Caps (with Threaded Stud) 1 Each - Removable Top Flange with Set Screw

NOTE: There are size limitations when hinging a door off a panel fastened using the VPK33. Call our Frameless Shower Department for details.

Cat No. / Description

Cat. No. VPK92XX

Floor to Ceiling Mount System Kit

1 Each - 2300mm length of 51mm diameter Round Tubing, with welded Bottom Flange and two Rivet Nuts


2 Each - Tube Adaptors with 38mm diameter End Caps (with Threaded Stud)


1 Each - Removable Top Flange with Set Screw

NOTE: Stock Kit is prepared for one degree floor slope to the inside of the shower. Shimming is required if floor is not a one degree slope to the inside of the shower, or a Custom Kit may be ordered instead.

CRL Glass Door Locks with Indicator

Swinging Door Application






Double Doors Glass-to-Glass

Sliding Door Application





Glass Sliding Door Glass Fixed Panel 704C

Lock and Keeper on Glass-to-Glass Doors

Features

Exterior View

Glass-to-Wall





Interior View

Cat. No. 700CXX

Cat No. / Description

Sliding Door Lock

• Choice of Swinging Door and Sliding Door Models

• Lock Can Be Used Glass-to-Wall, or Glass-to-Glass With Optional Matching Receiver

• Available in Up to Five Popular Finishes: Chrome, Brass, Antique Brass, Brushed Nickel, and Oil Rubbed Bronze





Cat. No. 701CXX Sliding Door Receiver





Cat. No. 703CXX Sliding Door Lock

Cat. No. 704CXX Sliding Door Receiver · Choice of Swinging Door and Sliding Door Models

- · Lock Can Be Used Glass-to-Wall, or Glass-to-Glass With Optional Matching Receiver
- Available in Up to Five Popular Finishes: Chrome, Brass, Antique Brass, Brushed Nickel, and Oil Rubbed Bronze


CRL Towel Bars

Material: 19mm Diameter Brass Tubing (1.5mm thick); 31.8mm Diameter Metal Washers

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm



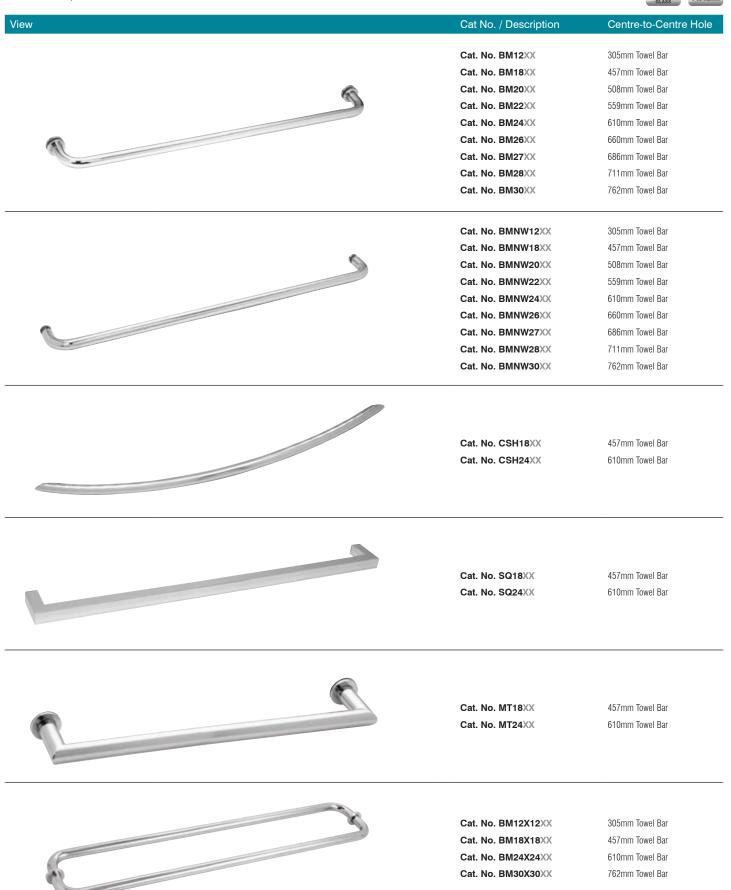


CRL Towel Bars

Material: 19mm Diameter Brass Tubing (1.5mm thick); 31.8mm Diameter Metal Washers

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm



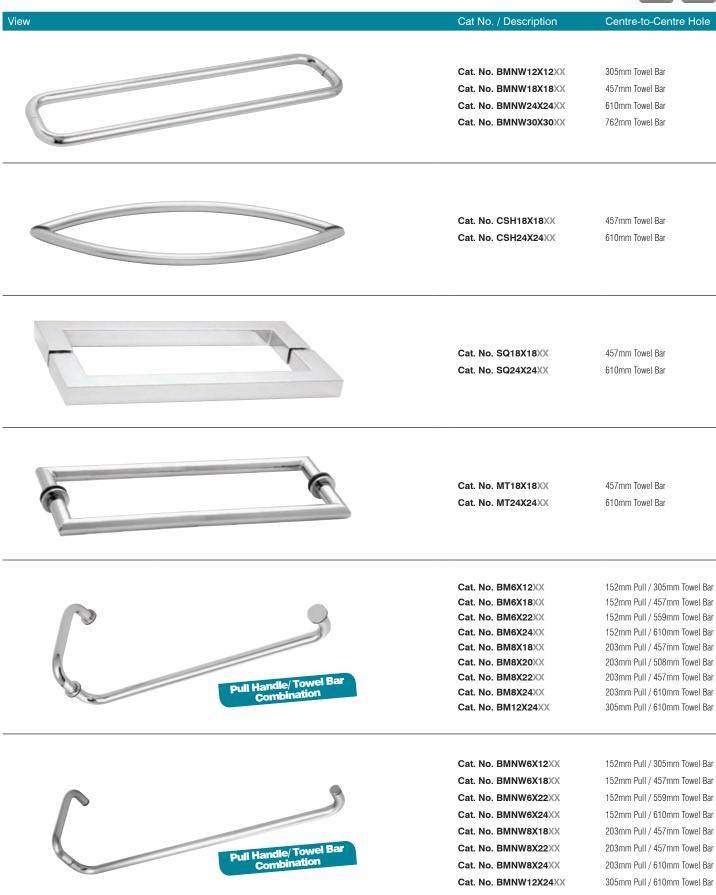

CRL Shower Door Seals



| View | Features | Cat No. / Description |
|------|--|--|
| 8mm | Can be used on inswing and outswing doors2.49m stock length | Cat. No. PCR8 CRL Translucent Vinyl Bulb Seal |
| 10mm | Can be used on inswing and outswing doors 2.49m stock length | Cat. No. PCR10 CRL Translucent Vinyl Bulb Seal |
| | Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways | Cat. No. P14WS CRL Dual Durometer PVC Seal and Wipe |
| | Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways | Cat. No. P770WS CRL Dual Durometer PVC Seal and Wipe |
| | Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways | Cat. No. P880WS CRL Dual Durometer PVC Seal and Wipe |
| 12mm | Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways | Cat. No. P120WS CRL Dual Durometer PVC Seal and Wipe |

CRL Shower Door Seals

| View | Features | Glass Thickness | ʻX' | 'Y' | Cat No. / Description |
|------|--------------|--------------------|--------|------|---|
| | Ť / I | 6mm | 16mm | - | Cat. No. P914WS CRL Co-Extruded Bottom Wipe With Drip Rail |
| | "Х" | 8mm | 16mm | - | Cat. No. P956WS CRL Co-Extruded Bottom Wipe With Drip Rail |
| - 1 | ↓ 10mm | 10mm | 19mm | - | Cat. No. P990WS CRL Co-Extruded Bottom Wipe With Drip Rail |
| | ()] | 12mm | 19mm | - | Cat. No. P912WS CRL Co-Extruded Bottom Wipe With Drip Rail |
| | ŤĮ Į | 0 | 10.000 | - | Oct No. Decord Oli Class Delters Dell With Tenslusert Wine |
| | "X" | 8mm | 10mm | - | Cat. No. P450BR CRL Clear Bottom Rail With Translucent Wipe |
| | | 10mm | 11mm | - | Cat. No. P500BR CRL Clear Bottom Rail With Translucent Wipe |
| 3 | | 12mm | 12mm | - | Cat. No. P660BR CRL Clear Bottom Rail With Translucent Wipe |
| | "X" | | | | |
| | | 8mm | 19mm | 11mm | Cat. No. PCC8 CRL "H" Jamb With Soft Leg |
| | | 10mm | 21mm | 12mm | Cat. No. PCC10 CRL "H" Jamb With Soft Leg |
| T | "V" | 12mm | 21mm | 12mm | Cat. No. PCC12 CRL "H" Jamb With Soft Leg |

| View | | Features | Cat No. / Description |
|------|------------------------------|--|--|
| 5 | 8mm | Can be used on inswing and outswing doors Close Gaps from 1.6 to 5mm 2.49m stock length Adheres using silicone only (not very hi-bond tape) | Cat. No. S1LB CRL Translucent Silicone Bulb Seal |
| 0 | 6.3mm | Pre-applied VHB tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths | Cat. No. SDTJT2 CRL SDTB with Pre-Applied Tape |
| 0 | 6.3mm | Pre-applied tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths | Cat. No. SDTBT2 CRL Deep U-Channel for 10mm Glass |
| 1 | 7.5mm6mm | Pre-applied VHB tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths | Cat. No. SDTDFT2 CRL SDTDF with Pre-Applied Tape |
| | 8mm Soft Leg Rigid Leg | Pre-applied tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths | Cat. No. SDTNLT2 CRL SDTNL with Pre-Applied Tape |
| | 8mm Soft Leg Rigid Leg | Pre-applied high-bond tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths | Cat. No. SDTLT2 CRL SDTL with Pre-Applied Tape |
| | Soft Leg 8mm Rigid Leg | Pre-applied high-bond tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths | Cat. No. SDTST2 CRL SDTS with Pre-Applied Tape |
| | 8mm | Pre-applied tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths | Cat. No. SDTWT2 CRL SDTW with Pre-Applied Tape |

Create the *o* perfect bathroom

with CRL's huge range of Shower Hardware and accessories, from installation to maintenance.

View

Cat No. / Description

View

D

Cat No. / Description

Α

HCCONST

Cat. No. EB1701 CRL Spray Glass Cleaner



Cat. No. PSB040 CRL Clear Plastic Setting Blocks



Cat. No. EWCW1 CRL Cleret Elite Squeegee



Cat. No. 16351 CRL E-Z Mount Mirror Clip Sets

| View | Cat No. / Description | View | Cat No. / Description |
|-------|--|--------------------|--|
| 1 | Cat. No. NDC4XX No-Drill Fixed Panel Clamp | C | Cat. No. 17600 CRL Chrome Deluxe Shower Squeegee |
| H H | Cat. No. 31M8010XX 180º Wall Mount Hinge Hold Open Hydraulic Self -Close | | Cat. No. SORH1XX CRL Polished Chrome Designer Series Sleeve- Over Robe Hook |
| | Cat. No. 31M8015XX 180º Glass-To-Glass Hinge Hold Open Hydraulic Self -Close | | Cat. No. WSR1 CRL Bio-Clean Water Stain Remover |
| P) | Cat. No. 31M8060XX One Way Swinging Wall Mount Hinge Hold Open Hydraulic Self -Close Ideal for saunas and steam rooms | | Cat. No. EU33SC CRL Clear Acetic Cure Silicone Sealant (Also available in black or white) |
| A | Cat. No. 7020MP - 7050MP CRL Heated Mirror Pads | Sand Sandar Lawar | Cat. No. EURTV408C CRL Clear Neutral Cure Silicone Sealant (Also available in black or white) |
| | Cat. No. D645BA CRL Brite Anodised Nose Aluminum "J" Channel | Contraction (March | Cat. No. WCS1 CRL Water Clear Silicone |
| SITT> | Cat. No. 1631A CRL Chrome Plated Dome Head No 8 Gauge Steel Screws | E | Cat. No. EUCCS CRL Crystal Clear Silicone Sealant |
| | Cat. No. DL631XX CRL Adjustable Shelf Brackets | FREIGIP | Cat. No. EG310 CRL evergrip [™] Mirror Adhesive Tubes |
| B | Cat. No. PC6100 CRL 6K Surface Protector - Pre Clean 1 litre Cat. No. NS6100 CRL 6K Surface Protector - Protect 1 litre | | Cat. No. GN100E CRL Gunther Ultra/Bond Mirror Mastic |

Colour range*

All CRL Frameless Shower Door products are available in a variety of beautiful stock finish to enhance the décor of the surrounding environments. Add the chosen colour code to a Cat No to complete your product code.

Note: Not all Finishes are available for every product, please call or consult **crlaurence.co.uk** for product specific colour options.



* The finishes shown are as close as possible to the actual item. Some images might look a little different when compared to the actual product.

Colour range

0

See our range of colour finishes overleaf. Keep the flap open for easy reference.



Call FREE on 00 800 0421 6144 Fax FREE on 00 800 0262 3299

Manchester

Charles Babbage Avenue Kingsway Business Park, Rochdale, OL16 4NW, England Tel: +44 (0) 1706 863 600 Fax: +44 (0) 1706 869 860 www.crlaurence.co.uk

Stuttgart



Copenhagen Stambolmen 7

Stamholmen 70 Unit B, DK-2650 Hvidovre Denmark Tel: +45 36 72 09 00 Fax: +45 36 70 33 35



France Boschstrasse 7 D-74360 Ilsfeld Germany

www.crlaurence.dk

Germany Tel: +49 (0) 7062 915 93 15 Fax: +49 (0) 7062 915 93 16 www.crlaurence.fr



View Our Full Range of Frameless Shower Door Hardware and Supplies...

Our EUSD12 Frameless Shower Door Hardware and Supplies Catalogue

Hinges

- Pull Handles
- Knobs
- Towel Bars
- Clamps
- Headers
- U-Channel
- Tapes
- Wipes
- Door Kits

You may also be interested in...

EUAH11 Architectural Hardware 'All Glass' Entrance Systems Catalogue

- Architectural Metals
- Door and Sidelite Rails
- Door Closers
- Centre Locks
- Glass Clamps
- Headers and Channels
- Ladder Pulls
- Locking Hardware
- Door Closers and Hinges
- Patch Hardwar
- Pivot Door Systems
- Push/Pull Handl
- Sliding and Stacking Glass Door Systems
- Spider Fittings
- Standoff System

Catalogues are available to download or view online at crlaurence.co.uk or crlaurence.de