


COMPANY NAME _____ PHONE _____
 CONTACT _____ ACCOUNT NO. _____ FAX _____
 JOB NAME _____ EMAIL _____

QUOTE ORDER P.O. # _____

SERIES	STANDARD PROFILE DIMENSIONS		
	STILE	TOP RAIL	BOTTOM RAIL
250 NARROW STILE	2"	2-1/8"	3-3/16"
400 MEDIUM STILE	3-1/2"	3-3/16"	6-1/2"
550 WIDE STILE	5"	5-1/2"	6-1/2"
DURAFRONT 800 MEDIUM STILE	3-1/2"	3-11/32"	6-1/2"
DURAFRONT 850 WIDE STILE	5"	5-1/2"	6-1/2"

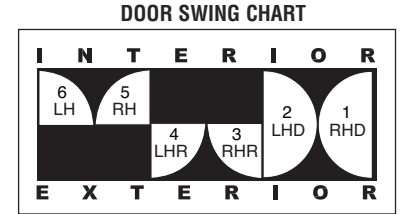

Use the Door Swing Chart to determine how the door(s) should be handed.

DOOR STILE

- Standard Entrance
 - 250 Narrow
 - 400 Medium
 - 550 Wide
- Durafront Entrance
 - 800 Medium
 - 850 Wide

TOP RAIL

- Standard
- 3-3/16" - Min for OHCC
- 5-1/2" - No OHCC
- 6-1/2"
- 9-1/2"
- Custom _____

PANIC DEVICES

- Jackson 1295 Rim Panic - Touchbar - STD
- Jackson 1285 Concealed Panic - Touchbar - STD
- Jackson 1095 Rim Panic - Crashbar
- Jackson 1085 Concealed Panic - Crashbar
- Jackson 3100 Mid-Panel CVR Panic
- Falcon 2390 Mid Panel CVR Panic
- Adams-Rite 8400 Mortise Panic
- Adams-Rite 8600 Concealed Panic
- Adams-Rite 8800 Rim Panic
- CRL - Blumcraft Panic
- Removable Mullion
- Custom by USALUM by Customer

DOOR SWING QTY

- LHR Hinge Left Swing Out _____ ea.
- RHR Hinge Right Swing Out _____ ea.
- LH Hinge Left Swing In _____ ea.
- RH Hinge Right Swing In _____ ea.
- LHD Hinge Left Double Acting _____ ea.
- RHD Hinge Right Double Acting _____ ea.
- PAIR Swing In _____ ea.
- PAIR Swing Out _____ ea.
- PAIR Double Acting _____ ea.

BOTTOM RAIL

- Standard
- 3-3/16"
- 5-1/2"
- 6-1/2"
- 7-1/2"
- 9-1/2"
- Custom _____

PUSH/PULL HARDWARE

- Standard Push Bars
- Standard Push/Pull
- Offset Pulls
- None (Supplied by Others) _____

DOOR FINISH

- 11 - Clear Anodized Class II - Standard
- 22 - Dark Bronze Anodized Class II - Standard
- 12 - Clear Anodized Class I
- 33 - Black Anodized Class I
- 44 - Custom Anodized Class I - Specify Color _____
- 52 - Bone White 70% Kynar (2-Coat)
- 71 - Standard 70% Kynar (2-Coat) Standard Color per Chart
- 71 - Custom 70% Kynar (2-Coat) - Specify _____
- 83 - Custom 70% Kynar (3-Coat) - Specify _____

DOOR HINGING

- Top/Bottom Offset Pivots
- 1 Pair Butt Hinges
- Center Pivot (Double Acting)
- Continuous Geared Hinge
- Intermediate Pivots DH022 DH010 Add _____ per Door
- Intermediate Butt Hinges Add _____ per Door

THRESHOLD

- None - Specify Bottom Clearance _____
- 4" - Standard for Center Hung Doors
- 4-3/4" - Standard for Offset Hung Doors
- 5"
- 7"
- Custom _____

DOOR OPENING SIZE

- 36" x 84"
- Custom Single _____ Door Tag # _____
- 72" x 84"
- Custom Pair _____ Door Tag # _____

LOCKING OPTIONS

- MS Hookbolt With Two Cylinders - STD
- Thumbturn in Lieu of Cylinder
- 3-Point Locking @ Pair
- Lock Indicator
- Cylinder Guard
- Flushbolts
- A.R. Latch/Deadlock
- A.R. Latchlock
- A.R. Long Throw Deadlock
- Paddle Handle
- A.R. Lever Handle DH569 DH021
- CRL Lever Handle
- Electric Strike
- No Locking Hardware

***MID-PANEL (MUNTIN)**

- 5/8" (15.9 mm) 6-3/16" (157.2 mm)
- 2" (50.8 mm) 6-1/2" (165.1 mm)
- 4-1/8" (104.8 mm) 7-1/2" (190.5 mm)
- 5" (127 mm) 9-1/2" (241.3 mm)
- Custom _____

*Dimensions do not include stops

GLASS STOP

- With 1/4" Square Glass Stops
- With 1/4" Bevel Glass Stops
- With 1" Glass Stops
- Other _____

DOOR SWEEP

- Yes No
- Exposed Fasteners
- Concealed Fasteners

DOOR CLOSER

- O.H. Concealed (Double Acting)
- O.H. Concealed (Offset)
- 90° 105°
- Hold Open Yes No
- Surface Mount
- Drop Plate
- Door Stop/Holder Degree _____
- No Closer Required

