













Inside this brochure you will find a selection of our best selling shower door products taken from our full, industry leading range.

From complete systems such as the popular CRL Hydroslide Sliding Shower Door Kit and the new CRL Serenity Series Sliding Door System, to accessories such as Hinges, Handles, Door Knobs, Channels and Clamps, CRL offers the complete package of quality hardware and accessories.

CRL offers the largest variety of Frameless Shower Door Hardware in the glass industry.

Hinges **04-15**

Sliding Shower Door Kits 16-18

U-Channels 19

Glass Door Clamps 22-24

Pull Handles & Knobs 25

Support Bars & Headers 28-32

Glass Door Locks 33

Towel Bars 34-35

Shower Door Seals 36-37

Shower Hardware & Accessories 38-39

Colour Range Back Cover Flap




For more information call FREE on

1800 424 275

e: crl_au@crlaurence.com f: 1800 813 013

CRL Geneva Series

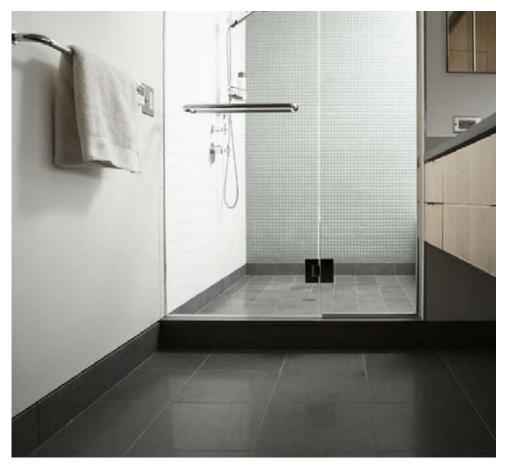

Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

Special Feature: Offers choice of Standard Model factory set at standard closing position $0^{\circ}\!,$ or 5° Pre-Set Model for tighter closure into shower interior

Construction: Solid Brass

Hinge Swings: 90° in and 90° out

Closing Type: Self-centreing when within 15 $^{\circ}$ of closed position.

Cut-Out Required

Includes: Gaskets, Screws, and Glass **Fabrication Dimensions**

Standard: DIN EN14428

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au











View

Cat No. / Description

Cat. No. GEN037XX

Wall Mount Full Back Plate Standard Model (Factory set for standard closing position)

Cat. No. GEN537XX

5° Pre-Set Model

(Factory set for 5° tighter closure into shower interior)



View

Cat No. / Description

Cat. No. GEN180XX

180° Glass-to-Glass Standard Model (Factory set for standard closing position)

Cat. No. GEN580XX

 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. GEN074XX

Wall Mount Short Back Plate Standard Model

Cat. No. GEN574XX

5° Pre-Set Model

(Factory set for 5° tighter closure into shower interior)



Cat. No. GEN045XX

135° Glass-to-Glass Standard Model (Factory set for standard closing position)

Cat. No. GEN545XX

5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. GEN044XX

Wall Mount Offset Back Plate (Factory set for standard closing position)

Cat. No. GEN544XX

Wall Mount Offset Back Plate (Factory set for standard closing position)



Cat. No. GEN092XX

90° Glass-to-Glass





(90°)





Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

Special Feature: Adjustable to Any Angle Up to 90° Without Having to Take Door Down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory

set position)

Closing Type: Self-centreing when within 15°

of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass **Fabrication Dimensions**

Standard: DIN EN14428

NOTE: Door Glass width may require alteration from standard clearance deductions when adjusting angles. Call for details.

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









Front View

Rear View

Cat No. / Description



Cat. No. GEN337XX Adjustable Wall Mount Full Back Plate

adjustable





Cat. No. GEN344XX Adjustable Chrome Wall Mount Offset Back Plate

adjustable





Cat. No. GEN345XX Adjustable 135° Glass-to-Glass

adjustable





Cat. No. GEN380XX Adjustable 180° Glass-to-Glass

adjustable

CRL Jamb Mounted Hinge Kits



Our Jamb Mounted Hinge Kits let you provide an 'all-glass' look shower door in an easy-to-install configuration. Water leakage around the door is minimised with the use of extruded aluminum jambs with vinyl for both the hinge and strike sides, and a clear vinyl sweep for the bottom. Kits come in your choice of three of our most popular finishes, with glass cut-out templates and installation instructions enclosed.

STANDARD HINGE KITS

For 8mm to 12mm Toughened Safety Glass.

1.83m High Geneva Series Kits 1.98m High Geneva Series Kits 1.83m High Pinnacle Series Kits 1.98m High Pinnacle Series Kits GFN03372X GEN03378X P1N03372XX

P1N03378XX

HEAVY DUTY HINGE KITS

For 10mm to 12mm Toughened Safety Glass.

1.83m High Vienna Series Kits

V1E03372XX

CRL Vienna Series



Suitable for heavier glass

Specifications

Glass Thickness: 10mm to 12mm Toughened Safety Glass Construction: Solid Brass

Hinge Swings: 90° in and 90° out

Closing Type: Self-centreing when within 15 $^{\circ}$ of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass

Fabrication Dimensions Standard: DIN EN14428

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









View

Cat No. / Description

Cat. No. V1E037XX

Wall Mount Full Back Plate Standard Model (Factory set for standard closing position)

Cat. No. V1E537XX

5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



View

Cat No. / Description

Cat. No. V1E074XX Wall Mount Short Back Plate



Cat. No. V1E044XX

Wall Mount Offset Back Plate Standard Model (Factory set for standard closing position)

Cat. No. V1E544XX

5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. V1E180XX

180° Glass-to-Glass Standard Model (Factory set for standard closing position)

Cat. No. V1E580XX

5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. V1E045XX

135° Glass-to-Glass



Cat. No. V1E092XX

90° Glass-to-Glass



Internal View of Vienna Hinge

Pin In Place (For "Mouse Ears" Cut-Out)

Pin Removed (For Square Corner Cut-Out)









Specifications

Glass Thickness: 10mm to 12mm Toughened Safety Glass

Special Feature: Adjustable to Any Angle Up to 90 Degrees Without Having to Take Door Down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass **Fabrication Dimensions**

Standard: DIN EN14428

NOTE: Door Glass Width May Require Alteration From Standard Clearance Deductions When Adjusting Angles. Call for Details.

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









Front View **Rear View** Cat No. / Description





Cat. No. V1E337XX Adjustable Wall Mount Full Back Plate

adjustable





Cat. No. V1E380XX

Adjustable 180° Glass-to-Glass

Adjustable Hinges open to 90°, only adjustable to 45°

adjustable

CRL Pinnacle Series



Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

Special Feature: Wall Mount Hinges and 180° Glass-to-Glass Hinge offer a choice of a Standard Model, factory set at standard closing position (0°), or a 5° Pre-Set Model for tighter closure into shower interior

Construction: Solid Brass

Hinge Swings: 90° in and 90° out

Closing Type: Self-centreing when within 15 $^{\circ}$ of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass

Fabrication Dimensions Standard: DIN FN14428

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









View

Cat No. / Description



Cat. No. P1N037XX

Wall Mount Full Back Plate Standard Model (Factory set for standard closing position)

Cat. No. P1N537XX

5° Pre-Set Model

(Factory set for 5° tighter closure into shower interior)



View

Cat No. / Description

Cat. No. P1N180XX

 180° Glass-to-Glass Standard Model (Factory set for standard closing position)

Cat. No. P1N580XX

 5° Pre-Set Model (Factory set for 5° tighter closure into shower interior)



Cat. No. P1N074XX

Wall Mount Short Back Plate Standard Model (Factory set for standard closing position)

Cat. No. P1N574XX

(Factory set for 5° tighter closure into shower interior)



Cat. No. P1N045XX

135° Glass-to-Glass



Cat. No. P1N044XX

Wall Mount Offset Back Plate Standard Model (Factory set for standard closing position)

Cat. No. P1N544XX

 $5^{\rm o}$ Pre-Set Model (Factory set for $5^{\rm o}$ tighter closure into shower interior)



Cat. No. P1N092XX

90° Glass-to-Glass

Pivot Pin See crlaurence.com.au for more Pivot Pin information







Specifications

Glass Thickness: 8mm to 12mm Toughened Safety Glass

Special Feature: Adjustable to any angle up to 90° without having to take door down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass **Fabrication Dimensions**

Standard: DIN EN14428

NOTE: Door Glass width may require alteration from standard clearance deductions when adjusting angles. Call for details.

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit











Front View

Rear View

Cat No. / Description





Cat. No. P1N337XX Adjustable Wall Mount Full Back Plate

adjustable





Cat. No. P1N344XX Adjustable Wall Mount Offset Back Plate

adjustable





Cat. No. P1N345XX Adjustable 135° Glass-to-Glass

adjustable





Cat. No. P1N380XX Adjustable 180° Glass-to-Glass

adjustable

CRL Cologne Series



Suitable for heavier glass

Specifications

Glass Thickness: 10mm to 12mm Toughened

Safety Glass

Construction: Solid Brass

Hinge Swings: 90° in and 90° out Closing Type: Self-centreing when within 15 $^{\circ}$

of closed position **Cut-Out Required**

Includes: Gaskets, Screws, and Glass

Fabrication Dimensions

Standard: DIN EN14428

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









View

Cat No. / Description

Cat. No. C0L037XX

Wall Mount Full Back Plate Standard Model

Cat. No. C0L537XX

5° Pre-Set Model

(Factory set for 5° tighter closure into shower interior)



View

Cat No. / Description

Cat. No. C0L180XX 180° Glass-to-Glass



Cat. No. C0L044XX

Wall Mount Offset Back Plate Standard Model (Factory set for standard closing position)

Cat. No. C0L544XX

(Factory set for 5° tighter closure into shower interior)



Cat. No. C0L045XX 135° Glass-to-Glass



Cat. No. C0L092XX

90° Glass-to-Glass



Internal View of Cologne Hinge

Pin In Place (For "Mouse Ears" Cut-Out)

Pin Removed (For Square Corner Cut-Out)









Specifications

Glass Thickness: 10mm to 12mm Toughened Safety Glass

Special Feature: Adjustable to any angle up to 90° without having to take door down

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory

set position)

Closing Type: Self-centreing when within 15 $^{\circ}$

of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass **Fabrication Dimensions**

Standard: DIN EN14428

NOTE: Door Glass width may require alteration from standard clearance deductions when adjusting angles. Call for details.

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 17 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au











Front View **Rear View** Cat No. / Description






Cat. No. C0L337XX Adjustable Wall Mount Full Back Plate

adjustable





Cat. No. C0L380XX Adjustable 180° Glass-to-Glass

adjustable

CRL Madrid Series Hinge / Clamp



Specifications

Glass Thickness:

8mm to 10mm Fixed Toughened Safety Glass 10mm to 12mm Door Toughened Safety Glass

Construction: Solid Brass Hinge Swings: Out only

Closing Type: Tight Closure to Strike Jamb

(Not Supplied)

No Cut-Out for Door; Fabrication Required for Fixed Panel Being Hinged From

Includes: Gaskets and Mounting Hardware This Hinge Series is Patented (Patent

Number 7,607,199)

For maximum weight and door width capacities please see crlaurence.com.au

*Mandatory use of 25 or 38mm heavy weight wall Dry Glaze U-Channel and Vinyl.

Colours

Chrome version shown below. 5 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









View

Cat No. / Description



Cat. No. MA06RXX

Right Hand

For 10mm door and 12mm fixed panel



Cat. No. MA07RXX

Right Hand

For 8mm door and 10mm fixed panel



Cat. No. MA06LXX

Cat No. / Description

Left Hand

For 10mm door and 12mm fixed panel



View



Cat. No. MA07LXX

Left Hand


For 8mm door and 10mm fixed panel



The MA06 and MA07 Hinge Sets are supplied complete with two Hinge/Clamps. When an order is placed for either the MA06 or MA07, one Hinge/Clamp for the top and one Hinge/Clamp for the bottom will be provided. The Hinge Sets are ordered as "Left Hand" or "Right Hand", as viewed from the outside of the shower. As an example, an MAO6L is a set of both top and bottom hinges mounted to the left side of a door, when viewed from the outside of the shower. An MAO6R is a set of both top and bottom hinges mounted to the right side of a door, when viewed from the outside of the shower

Gaskets Cat. No. RG38100 For 10mm fixed panel


Cat. No. RG12100 For 12mm fixed panel



Cat. No. WU3SASL*

Satin Anodised 25mm Deep Dry Glaze U-Channel

(Also available in Brite Anodised, Brite Gold Anodised Brushed Nickel Anodised and Painted Oil Rubbed Bronze finishes)



Cat. No. WU1SASL*

Satin Anodised

38mm Shallow Dry Glaze U-Channel (Also available in Brite Anodised, Brite

Gold Anodised, Brushed Nickel Anodised and Painted Oil Rubbed Bronze finishes)

CRL Grande Series



Specifications

Glass Thickness: 8 to 10mm Toughened Safety Glass

Special Feature: Have ability to be side mounted at top and bottom corners of the door, or anywhere in-between. Corner mounting allows more glass exposure

Construction: Solid Brass

Hinge Swings: 90° in and 90° out (at factory set position)

Closing Type: Precise closing to 0 Degrees.

Cut-Out and Hole Required

Includes: One Hinge, Gaskets, Screws and

Template

Standard: DIN EN14428

For maximum weight and door width capacities please see crlaurence.com.au

Colours

Chrome version shown below. 8 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









View

Cat No. / Description



Cat. No. GRA037XX Grande Wall Mount Standard Back Plate Hinge

View

Cat No. / Description



Cat. No. GRA337XX

Adjustable Standard Wall Mount Grande Series Hinge

adjustable



Cat. No. GRA044XX Grande Wall Mount Offset Back Plate Hinge



Cat. No. GRA344XX

Adjustable Offset Wall Mount Grande Series Hinge

adjustable



Cat. No. GRA090XX Grande 90 Degree Glass-to-Glass Hinge



Cat. No. GRA390XX

Adjustable 90 Degree Glass-to-Glass Grande Series Hinge

adjustable



Cat. No. GRA180XX Grande 180 Degree Glass-to-Glass Hinge

35 Degree Glass-to-Glass Hinge



Cat. No. GRA380XX

Adjustable 180 Degree Glass-to-Glass Grande Series Hinge

adjustable

CRL Prima Series



Specifications

Glass Thickness: 8mm to 10mm Toughened Safety Glass

Special Feature: Top and Bottom Mount design allows more glass to show. Use of these hinges reduce quantity of cut-outs required when compared to standard side mount glass-to-glass hinges. Cat. No. PPH01 can be mounted floor and ceiling, or floor and header

Construction: Solid Brass Hinge Swings: Full Rotation

Closing Type: Self-centreing when within 15° of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions

This hinge series is patented (Patent Number 5297313)

For maximum weight and door width capacities please see crlaurence.com.au

Pivot Pin Available See crlaurence.com.au for more information

Colours

Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au





Cat No. / Description





View

Cat No. / Description



Cat. No. PPH01XX Top or Bottom Mount Can be adapted to Deluxe Header Kit



View

Cat. No. PPH03XX L-Bracket Wall Mount



Cat. No. PPH06XX Top Mount Compatible only with EZ-Adjust Header. Use Cat. No. PPH01 as bottom hinge.



Cat. No. PPH135LXX 135º Glass-to-Glass Left Hand Mount when viewed from outside of shower





Cat. No. PPH02XX Glass-to-Fixed Transom Mount



Cat. No. PPH05LXX Offset Bracket Wall Mount Left Hand Mount when viewed from outside of shower

Cat. No. PPH05RXX Offset Bracket Wall Mount Right Hand Mount when viewed from outside of shower



Cat. No. PPH07XX Top or Bottom Mount with Attached U-Clamp



adjustable

Cat. No. PPH301XX CRL Chrome Adjustable Prima Series Hinge

CRL Junior & Senior Prima Series



Specifications

Glass Thickness: Prima Senior -12mm Toughened Safety Glass

Glass Thickness: Prima Junior -6mm Toughened Safety Glass

Junior Prima Special Feature: Top and bottom mount allows more glass exposure. Can also save on glass fabrication costs when compared to use of Side Mount Glass-to-Glass Hinges requiring more cut-outs.

Construction: Solid Brass Hinge Swings: Full Rotation

Closing Type: Self-centreing when within 15 $^{\circ}$ of closed position

Cut-Out Required

Includes: Gaskets, Screws, and Glass Fabrication Dimensions. Adjustable Prima also includes 3mm Allen Wrench.

For maximum weight and door width capacities please see crlaurence.com.au

Pivot Pin Available See crlaurence.com.au for more information

Colours

Chrome version shown below. 5 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au











View

Cat No. / Description



PRIMA SENIOR Cat. No. SRPPH01XX Top or Bottom Mount



PRIMA SENIOR Cat. No. SRPPH02XX Glass-to-Glass Mount

View For 6mm glass

PRIMA JUNIOR Cat. No. JRPPH01XX


Top or Bottom Mount

Cat No. / Description



PRIMA JUNIOR Cat. No. JRPPH02XX Glass-to-Fixed Transom Mount

CRL Serenity Series Sliding Door System

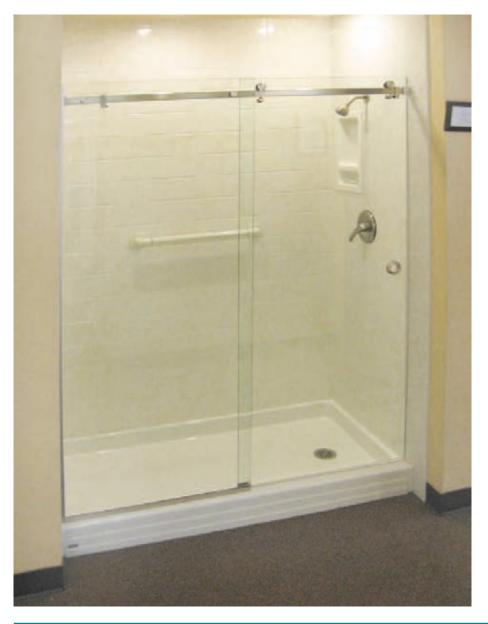

Specifications

Glass Thickness: 8mm or 10mm Toughened Safety Glass

Construction: Stainless steel

Maximum Door Weight: Do not exceed either 762mm wide or 40kg

Fabrication: Holes required in both door and fixed panel (see **crlaurence.com.au**)

Colours

Polished Stainless (PS) shown below, also available in Brushed Stainless (BS). For details please see the flip out chart at the rear of this brochure or visit **crlaurence.com.au**









View

Cat No. / Description



Cat. No. SERF2XX

Standard 180 Degree Kit Includes:

- 1 2m length header support bar
- 2 Rollers
- 2 Stoppers
- 2 Anti-lift fittings
- 2 Track holder fittings for wall
- 2 Track holder fittings for fixed panel
- 1 Thru-glass pull
- 1 Door guide





Cat. No. SER90XX

Accessory kit for 90 degree return Connects to wall fitting for 90 degree installations

CRL Hydroslide Sliding Shower Door Kits



Specifications

Glass Thickness: 8mm or 10mm Toughened Safety Glass

Construction: Plated or Lacquered Solid Brass Fittings; Anodised Aluminium Sliding Door Track

Maximum Door Weight: 40kg

Includes: Gaskets, Screws, and Glass Fabrication Information. Complete installation instructions along with glass and metal cutting formula available at crlaurence.com.au

Colours

Chrome (CH) version shown below. 4 attractive colours available, Chrome (CH), Brass (BR), Brushed Nickel (BN), and Oil Rubbed Bronze (ORB). For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au









View

Cat No. / Description



Cat. No. HYDK60XX 180° Standard Kit 1524mm Cat. No. HYDK84XX 180° Standard Kit 2134mm

180° Standard Kit Consists of:

1 - Sliding Glass Door Upper Track

2 - Sliding Glass Door Rollers

1 - Sliding Glass Door Floor Guide

1 - 914mm Half-Round SDT980 Threshold

2 - Hangers for Sliding Glass Door 2 - Sliding Glass Door Roller Stops

2 - 90 Degree Wall-to-Upper Track Connectors

1 - 2489mm DK98L L-Seal for wall

2 - 180 Degree Glass-to-Sliding Track Connectors NOTE: Bottom Fixed Glass Attachments, Handles or Knobs must be ordered separately.

Cat. No. HYDA9XX

90° Wall-to-Glass Accessory Kit Consists of:

1 - 90 Degree Glass-to-Sliding Track Connector 1 - 90 Degree Wall-to-Glass Bracket

*90 Degree Units require that you order one 180 Degree Standard Kit plus one 90 Degree Accessory Kit

CRL Essence Series Sliding Shower Door System



Specifications

Glass Thickness Range: 12mm toughened safety glass (Not included)

Material: Rollers and top guide, constructed of solid brass; bottom sliding track and U-Channel constructed of aluminium; clear plastic L-jamb

Maximum Door Size: Do not exceed either 787mm wide or 50.8 kg

Basic Kit Fabrication: Notch required for bottom rollers, holes required for top guide (see crlaurence.com.au for details)

Colours

Chrome (CH) version shown below. 4 attractive colours available, Chrome (CH), Brass (BR), Brushed Nickel (BN), and Oil Rubbed Bronze (ORB). For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au













View

Cat No. / Description

Cat. No. ESS1XX Basic Essence Kit

Basic ESS1 kit includes the following:

- 2 Bottom Rollers
- 1 Top Door Guide
- 1 1.63m Length Bottom Track
- 1 2.49m Length U-Channel 1 2.49m Length Plastic L-Seal
- 1 SDCEC12 End Cap for Channel
- 1 M6164 Shower Door Bumper

NOTE: Glass Clamps, Handle or Knob, and Other Accessories Sold Separately.


*90 Degree Units require that you order two each CL90S wall mount brackets, two each CL090 90 degree glass-to-glass brackets, and a basic ESS1 kit in your choice of finish.

CRL U-Channels









Cat No. / Description View **Features** • Clear vinyl secures glass in channel and eliminate the Cat. No. DUC38XX need for messy silicone CRL Dry Glaze U-Channel for 10mm Glass only · Recess in bottom channel hides caulk line Cat. No. DUC516XX · Channel and matching end caps available in several CRL Dry Glaze U-Channel for 8mm Glass only popular finishes · Extremely versatile extrusion in several popular finishes



- · Wet glazed with clear silicone to secure glass
- · Popular 2.49m lengths
- Five popular finishes available

Cat. No. SDCD516XX CRL Single U-Channel for 8mm Glass



- Deep pocket for securing fixed panels of glass
- May be used alone or with regular depth U-Channel
- Wet glazed with clear silicone to secure glass
- · Popular 2.49m lengths
- Visit crlaurence.com.au for other available finishes and economical 3.66m stock lengths

Cat. No. SDCD38XX

CRL Deep U-Channel for 10mm Glass

Cat. No. SDCD12XX

CRL Deep U-Channel for 12mm Glass



- Covers Open End of SDCD38 Series U-Channels
- · Visit crlaurence.com.au for other available finishes


Cat. No. SDCEC38XX

End Cap

- Covers Open End of SDCD12 and DUC38 Series U-Channels
- · Visit crlaurence.com.au for other available finishes

Cat. No. SDCEC12XX

End Cap

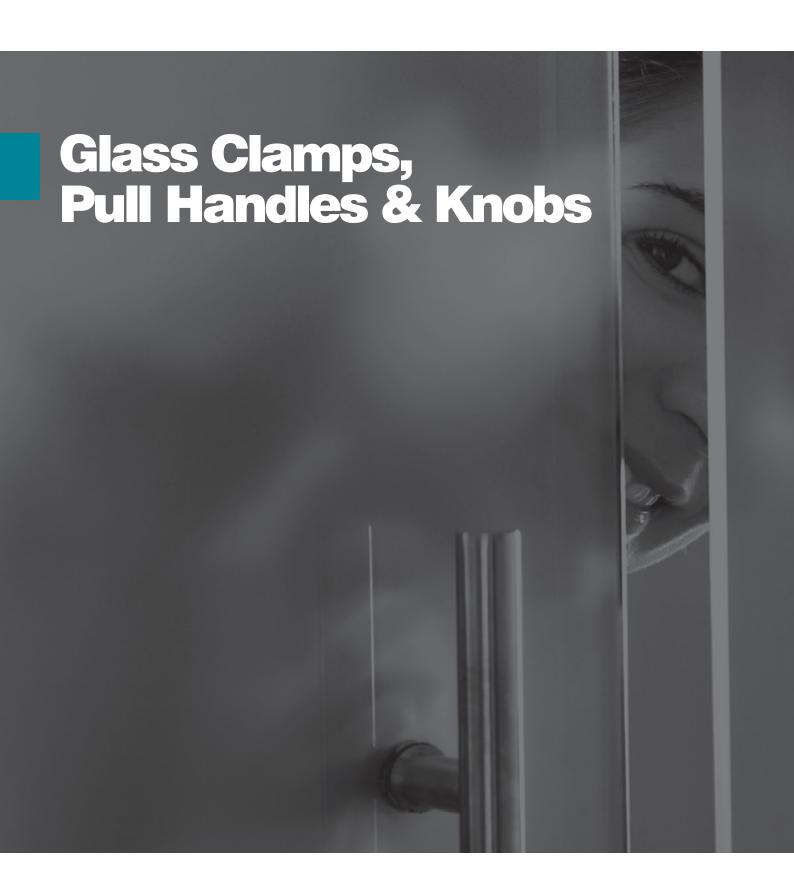



CRL Wall Mount Clamps mount directly to the wall, ceiling or floor to secure vertical fixed glass panels in contemporary shower enclosures. We also offer Glass-to-Glass Clamps that assist in maintaining the frameless appearance and provide a clean looking alternative to a U-Channel.

Our offering has evolved over the years to over 25 series of Glass Clamps in various configurations and beautiful finishes.



CRL Square Style Heavy-Duty Glass Clamps



Specifications

Glass Thickness: 10mm to 12mm

Construction: Solid Brass

Glass Fabrication Required: SGCU1 requires notch; other clamps require holes or

hole and notch combination

Includes: Mounting Screws and Gaskets

Colours: Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this

brochure or visit crlaurence.com.au









View

Cat No. / Description



Cat. No. CAT. NO. SCU48CH

For 8mm Glass Chrome finish only

Size: 51mm W x 51mm H



Cat No. / Description

Cat. No. SGC180XX Square 180° Glass-to-Glass Clamp

Size: 127mm W x 51mm H

Cat No. / Description



Cat. No. SGC188XX Square 180° Glass-to Glass Movable Transom Clamp

Size: 103mm W x 51mm H



Cat. No. SGCU1XX Square Wall Mount Clamp (Notch-in-Glass Style)

Size: 51mm W x 51mm H



Cat. No. SGC135XX Square 135° Glass-to-Glass Clamp

Each Leg Size: 64mm W x 51mm H



Cat. No. SGCU1G Replacement Gasket

Notch Style



Cat. No. SGC037XX Fixed Panel Square Clamp

(with Small Leg)

Clamp Size: 51mm W x 51mm H

Leg Size: 35mm W x 51mm



Cat. No. SGC90XX

Square 90° Glass-to-Glass Clamp

Each Leg Size: 64mm W x 51mm H



Cat. No. SCU4G Replacement Gasket Hole Style



Cat. No. SGC039XX Fixed Panel Square Clamp

(with Large Leg)

Cat. No. SGC039CH

For 8mm Glass Chrome finish only

Clamp Size: 51mm W x 51mm H

Leg Size: 51mm W x 51mm H




Cat. No. SGC186XX

Square Wall Mount Movable Transom Clamp

51mm W x 51mm H

CRL Bevelled Style Heavy-Duty Glass Clamps

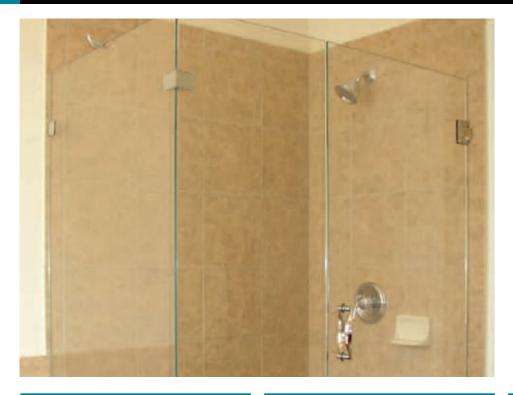

Specifications

Glass Thickness: 10mm to 12mm

Construction: Solid Brass

Glass Fabrication Required: BGCU1 requires notch; other clamps require holes or

hole and notch combinations

Includes: Mounting Screws and Gaskets

Colours: Chrome version shown below. 20 attractive colours available. For details please see the flip out chart at the rear of this

brochure or visit crlaurence.com.au









View

Cat No. / Description

Cat. No. BCU4XX Square Wall Mount Clamp (Hole-in-Glass Style)

Cat. No. BCU48CH For 8mm Glass Chrome finish only

Size: 51mm W x 51mm H

View

Cat No. / Description





Cat No. / Description



Size: 103mm W x 51mm H



Cat. No. BGCU1XX Square Wall Mount Clamp (Notch-in-Glass Style)

Size: 51mm W x 51mm H



Cat. No. BGC135XX Square 135° Glass-to-Glass Clamp

Each Leg Size: 64mm W x 51mm H



Cat. No. BGCU1G Replacement Gasket Notch Style



Cat. No. BGC037XX

Fixed Panel Square Clamp (with Small Leg)

Cat. No. BGC037CH For 8mm Glass Chrome finish only

Clamp Size: 51mm W x 51mm H

Leg Size: 35mm W x 51mm



Cat. No. BGC90XX

Square 90° Glass-to-Glass Clamp

Each Leg Size: 64mm W x 51mm H



Cat. No. BCU4G Replacement Gasket Hole Style



Cat. No. BGC039XX

Fixed Panel Square Clamp (with Large Leg)

Clamp Size: 51mm W x 51mm H Leg Size: 51mm W x 51mm H



Cat. No. BGC186XX

Square Wall Mount Movable Transom Clamp

51mm W x 51mm H

CRL Adjustable Glass Clamps

View

Rear View

Cat No. / Description



Adjustable Wall Mount Clamp

Size: 49mm Wide x 44mm High

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 22mm

Includes: Clear Gaskets and Mounting Screw









adjustable

Cat. No. ADJ180XX

Adjustable Glass-to-Glass Mount Clamp

Size: 49mm Wide (each leg) x 44mm High

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 22mm

Includes: Clear Gaskets and Mounting Screw





Glass Brackets to match Hinges

Front View

Cat No. / Description



Cat. No. GE090SXX

Glass-to-Glass Bracket

Cat. No. GE90SXX

Wall Mount Bracket

Matches configuration of the hinges listed above

Colours: Chrome version shown opposite. 14 attractive colours available.

For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au

Glass Thickness Range: 8 to 12mm Hole Diameter Required: 19mm







To suit: Pinnacle, Prima, Senior Prima, Cologne and Estate Range

Cat. No. P1090XX Glass-to-Glass Bracket

Cat. No. P190SXX

Matches configuration of the hinges listed above

Colours: Chrome version shown opposite. 14 attractive colours available.

For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au

Glass Thickness Range: 8 to 12mm Hole Diameter Required: 19mm



CRL Traditional Style Glass Clamps

View

Cat No. / Description

Cat. No. UC77XX

Traditional Style Fixed Panel U-Clamp

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 16 or 19mm

Includes: Mounting Screws (for Wall Clamps) and Clear Gaskets

*An additional set of clear gaskets (Cat. No. UCG77) is required for 8mm glass

Cat No. / Description

Cat. No. GCB90XX

90 Degree Traditional Style Glass-to-Glass Clamp

Glass Thickness Range: 8mm to 10mm

Hole Diameter Required: 16 or 19mm

Includes: Gaskets and Wood Screw for wall mount application.

*An additional set of gaskets is required for 8mm glass (Cat. No. UCG77)



Cat. No. GCB184XX

180 Degree Traditional Style Double Stud Glass-to-Glass Clamp

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 16 or 19mm

Includes: Gaskets.

*An additional set of gaskets is required for 8mm glass (Cat. No. GCBG184).



Cat. No. GCB182XX

180 Degree Traditional Style Split Face and "Y" Inline Glass-to-Glass Clamp

Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: 16 or 19mm

Includes: Gaskets, Screw for "Y" Inline Clamp use. *An additional set of gaskets is required for 8mm glass (Cat. No. UCG77).

CRL Pull Handles and Knobs

View

Cat No. / Description

BM Series Back-to-Back Pull Handles

Cat. No. BM6X6XX

152mm size with metal washers

Cat. No. BM8X8XX

203mm size with metal washers

Material: 19mm Diameter Brass Tubing (1.5mm thick), 31.8mm Diameter Washers

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm: 203mm



View

Cat No. / Description

CRL SDK Series Knobs

Cat. No. SDK106XX

30mm Round Knob Set

Material: Solid Brass Material

Glass Thickness Range: Fits 6 to 12mm Thick Glass

Available in Several Attractive Finishes

Hole ø 10 or 12mm



BM Series Back-to-Back Pull Handles

Cat. No. BMNW6X6XX

152mm size without metal washers

Cat. No. BMNW8X8XX

203mm size without metal washers

Material: 19mm Diameter Brass Tubing (1.5mm thick)

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm; 203mm



CRL SDK Series Knobs

Cat. No. SDK160XX

30mm Square Knob Set

Material: Solid Brass Material

Glass Thickness Range: Fits 6 to 12mm Thick Glass

Available in Several Attractive Finishes

Hole ø 12mm



Crescent Style Back-to-Back Pull Handles

Cat. No. CSH6X6XX 152mm

Cat. No. CSH8X8XX 203mm

Material: 19mm Brass Tubing

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm; 203mm



CRL SDK Series Knobs

Cat. No. SDK140XX

25mm Round Knob Set

Material: Solid Brass Material

Glass Thickness Range: Fits 6 to 12mm Thick Glass

Available in Several Attractive Finishes

Hole ø 10 or 12mm



SQ Series Square Tubing Mitred Corner Back-to-Back Pull Handles

Cat. No. SQ6X6XX 152mm

Cat. No. SQ8X8XX 203mm

Material: 19mm Brass Tubing

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm, 203mm



CRL SDK Series Knobs

Cat. No. SDK112XX

19mm Square Knob Set without Plastic Sleeve

Cat. No. SDKP112XX


19mm Square Knob Set with Plastic Sleeve

Material: Solid Brass Material

Glass Thickness Range: Fits 6 to 12mm Thick Glass

Available in Several Attractive Finishes

Hole ø 10 or 12mm



MT Series Round Tubing Mitred Corner Back-to-Back Pull Handles

Cat. No. MT6X6XX 152mm

Cat. No. MT8X8XX 203mm

Material: 19mm Brass Tubing; 31.75mm Metal Washers

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm, 203mm



CRL Chrome Back-to-Back Bow-Tie Style Knobs

Cat. No. SDK109XX

Back-to-Back Knob

Solid Brass Material

Fits 6 to 12mm Thick Glass

Available in Several Beautiful Finishes

Hole ø 10 or 12mm



RM Series Flat Outside Surface/Round Tubing Inside Back-to-Back Pull Handles

Cat. No. RM6X6XX 152mm

Cat. No. RM8X8XX 203mm

Material: 19mm Brass Tubing

Glass Thickness Range: 6mm to 12mm

Hole Diameter Required: 12mm

Centre-to-Centre Hole: 152mm, 203mm



Cat. No. LP6X6XX Cat. No. LP8X8XX

203mm Handle

Mounting Holes / Centre-to-centre

152mm / 203mm

Material: 19mm Brass Tubing 152 and 203mm Sizes 32mm Brass Tubing All Other Glass Thickness Range: 8mm to 12mm

Hole Diameter Required: For 152 and 203mm Handles: 12mm





Our range of Support Bars comes in a variety of lengths and finishes, suitable for different glass thicknesses, to enable you to create your perfect bathroom space.

Our range of Towel Bars will add a touch of elegance and class to your bathroom. Constructed of tubular brass, CRL's Towel Bars ensure your door installations will last for a long time as their lightweight properties help to keep the weight of the door hardware to a minimum.

All CRL Frameless Shower Door Hardware has consistent finishes and will instantly add a look of quality to the appearance of your enclosure, and with proper care and cleaning, will remain beautiful for years to come.



CRL Support Bar Fittings




Thru-Glass to Wall Rod

| Material: 19mm Diameter Stainless Steel Tubing | Bar Lengths: 1.83m | Glass Thickness Range: 6 to 12mm | Glass Fabrication Required: 12mm Diameter Hole | Includes: 19mm Diameter End Cap on One End | Polished Stainless (PS) shown, also available in Brushed | Stainless (BS). For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au | Cat. No. TUBE3472XX | Thru-Glass to Wall Rod | Requires additional fitting for wall attachment | i.e. S3 or S12 |

Through-Glass Mounted Support Bar

The Through-Glass Mounted Support Bar creates a means of support that strengthens an enclosure's structural integrity. It may be used in place of a header in certain applications (call for details) and can be mounted to a wall, ceiling or glass-to-glass. Supplied Bar is 991mm long, requires a 16mm hole in the glass, and comes in finishes to match our Hinges and Pull Handles. All mounting hardware included.

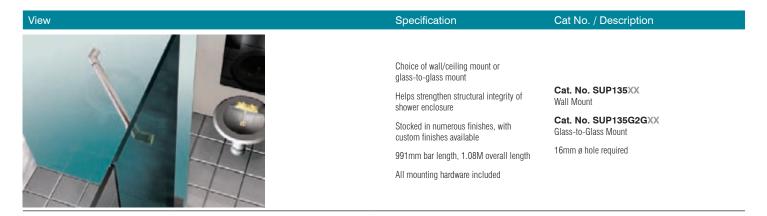

Mitred Support Bar Bracket

The Mitred Support Bar Wall Mount Bracket is designed to attach to the wall by slipping over a screw mounted stud that is secured into the wall. Perfect for an inline panel needing to be secured to an adjacent wall for stability. The Bracket comes in matching finishes, and fits any of our Fixed Panel Support Bars. Mitre of Bracket ensures flush fit against wall.

View		Specification	Cat No. / Description
0			Cat. No. SBB45XX 45° Bracket Cat. No. SBB22XX
Cat. No. SBB45	Cat. No. SBB22	Attaches to wall easily via a screw-mounted stud	22.5° Bracket
45° Bracket	22.5° Bracket	Available in many popular finishes	
45° Bracket	22.5° Bracket		



These Fixed Panel Support Bars stabilize fixed panels of glass in enclosures that do not go all the way up to the ceiling. Bars are available in two lengths, and in sizes to secure 6mm to 12mm thick glass. Finishes are available to match most of our hinges, knobs, and pull handles. No holes or cut-outs are required in the glass.

View	Specification	Cat No. / Description	
	Material: 19mm Diameter Tubular Brass Bar, Solid Brass Fittings	Cat. No. SUP26XX Glass-to-Glass Model Support Bar for 6mm to 8mm glass	
Glass-to-Glass	Colours: Chrome version shown opposite. 20 attractive colours available. For details	Length: 1m	
	please see the flip out chart at the rear of this brochure or visit crlaurence.com.au	Cat. No. SUP20XX Glass-to-Glass Model Support Bar for 10mm to 12mm glass Length: 1m	
	Bar Lengths: 1m; 1.3m		
	Glass Thickness Range: 6mm to 8mm, and 10mm to 12mm	Cat. No. SUP20XX51 Glass-to-Glass Model	
	Includes: All Required Mounting Hardware	Support Bar for 10mm to 12mm glass Length: 1.3m	
	Material: 19mm Diameter Tubular Brass Bar, Solid Brass Fittings	Cat. No. SUP06XX Wall-to-Glass Model Support Bar for 6mm to 8mm glass Length: 1m	
Wall-to-Glass	Colours: Chrome version shown opposite.		
	20 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au	Cat. No. SUP10XX Wall-to-Glass Model Support Bar for 10mm to 12mm glass	
	Available Bar Lengths: 1m; 1.3m	Length: 1m	
•	Glass Thickness Range: 6mm to 8mm, and 10mm to 12mm	Cat. No. SUP10XX51 Glass-to-Glass Model	
	Includes: All Required Mounting Hardware	Support Bar for 10mm to 12mm glass Length: 1.3m	

View Cat No. / Description Cat No. / Description Cat. No. S9XX Cat. No. S3XX Vertical Support Bracket for 6mm to 8mm Glass Wall Mount Fitting Cat. No. S910XX Chrome version shown opposite. 19 attractive For 10mm to 12mm Glass colours available. For details please see the flip out Chrome version shown opposite. 19 attractive colours chart at the rear of this brochure or visit available. For details please see the flip out chart at the crlaurence.com.au rear of this brochure or visit crlaurence.com.au Cat. No. S4XX Swiveling U-Bracket for 6mm and 8mm Glass Cat. No. S12XX Slim Line Wall Mount Fitting Cat. No. S5XX Swiveling U-Bracket for 10mm and 12mm Glass Chrome version shown opposite. 19 attractive colours Chrome version shown opposite. 19 attractive colours available. For details please see the flip out chart at the



Cat. No. S6XX Movable Bracket for 6mm Glass

Cat. No. S7XX

Movable Bracket for 10mm Glass

Chrome version shown opposite. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au

available. For details please see the flip out chart at the

rear of this brochure or visit crlaurence.com.au



Cat. No. S8XX 90° Corner Bracket for Support Bars

Chrome version shown opposite. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au



Cat. No. S13XX

Slim Line Glass Mount Fitting for 6mm to 12mm Glass

rear of this brochure or visit crlaurence.com.au

Chrome version shown opposite. 19 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au



Cat. No. S1XX 1m Bar Only

Cat. No. S2XX 1.3m Bar Only

Cat. No. S80 2.03m Bar Only

Material: 19mm Diameter Tubular Brass Bar. Available Bar Lengths: 1m; 1.3m; 2.03m.

Chrome version shown opposite. 19 attractive colours available.


CRL Square Support Bar and Accessory Fittings





View Specification Cat No. / Description Material: 19mm square tubing, solid brass fittings Chrome version shown. 5 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au Cat. No. SQ59XX Bar Lengths: 1.5m 1.5m Square Bar New square tubing matches geometry of many popular CRL hinges Provides fixed panel support for enclosures not going to the ceiling

No hole drilling required in glass View Cat No. / Description View Cat No. / Description Cat. No. SQ41XX Swiveling U-Bracket for 6 to 8mm Glass for Square Bar Cat. No. SQ47XX 45° Mitred Wall Mount Bracket for Square Bar Cat. No. SQ42XX Swiveling U-Bracket for 10 to 12mm Glass for Square Bar Cat. No. SQ43XX Cat. No. SQ48XX Movable Bracket for 6 to 8mm 22.5° Mitred Wall Mount Bracket for Square Bar Glass for Square Bar Cat. No. SQ44XX Cat. No. SQ49XX







Cat. No. SQ46XX Wall Mount Bracket for Square Bar

CRL EZ-Adjust Shower Door Header Kit



Features

- Secures shower enclosure not going to ceilina
- · Allows horizontal (side-to-side) adjustment of hinge after installation
- No hole drilling required through header for adaptor, if using Prima Hinge model PPH06 or Senior Prima Hinge model SRPPH06
- Constructed of heavy 6063-T5 aluminium
- For use with 8mm, 10mm and 12mm thick glass

Colours

Chrome version shown. 8 attractive colours available. For details please see the flip out chart at the rear of this brochure or visit crlaurence.com.au




View Specification Cat No. / Description



Each Kit Contains

- 1 2.49m or 3.6m Header Length
- 1 914mm Snap-In Filler Insert for Door Pocket
- 1 Deluxe Wall Mount Bracket Kit (Two Brackets)
- 2.44m or 3.65m of 8mm and 10mm Clear Vinvl

Vinyl not required for 12mm Glass



Cat. No. EHK98XX

2.49m EZ-Adjust Shower Door Header Kit

Cat. No. EHK144XX

3.65m EZ-Adjust Shower Door Header Kit

If using Prima Hinge Model PPH06 or Senior Prima Hinge Model SRPPH06, hinge can be adjusted side-to-side after installation. No drilling required to install hinge into header if using those hinges.

CRL Deluxe Shower Door Header Kit



Each Kit Contains

- 1.67m, 2.49m or 3.65m Piece of Header Extrusion
- .91m Piece of Snap-In Filler for Door Pocket
- Vinyl for 8mm and 10mm Glass (not needed for 12mm)
- Pack of two SHB100 Aluminium Wall Mounting Brackets and pack of two BWB2 Brass Wall Mounting Brackets (use set of your choice)

SDH Series Flat/Round Profile Cat. No. SDH660XX

1.67m Deluxe Header Kit

Cat. No. SDH980XX 2.49m Deluxe Header Kit

Cat. No. SDH144XX 3.65m Deluxe Header Kit

SQH Series Flat/Flat Profile Cat. No. SQH980XX 2.49m Deluxe Header Kit

SDH Series

SQH Series

CRL Frameless Vertical Post System



Specifications

- Stock or custom kits allow user to stabilise fixed panels of glass not going to ceiling
- Excellent alternative to traditional horizontal header systems
- Four popular stock finishes for 8, 10, and 12mm glass
- Glass fabrication required for tube adaptors/ end caps with 19mm holes
- Custom kits available in various finishes, post configurations, and with dome or ball style glue-in end caps (Two-Point System only)





Cat No. / Description

Cat. No. VPK33XX

Two Point Ceiling Mount System Kit

1 Each - $\,$ 838mm length of 51mm diameter Round Tubing, two Rivet Nuts, and Flat Style End Cap

2 Each - Tube Adaptors with 38mm diameter End Caps (with Threaded Stud)

1 Each - Removable Top Flange with Set Screw

NOTE: There are size limitations when hinging a door off a panel fastened using the VPK33. Call our Frameless Shower Department for details.

Cat No. / Description

Cat. No. VPK92XX

Floor to Ceiling Mount System Kit

 $1\,\mbox{Each} - 2300\mbox{mm}$ length of $51\mbox{mm}$ diameter Round Tubing, with welded Bottom Flange and two Rivet Nuts


2 Each - Tube Adaptors with 38mm diameter End Caps (with Threaded Stud)

1 Each - Removable Top Flange with Set Screw

NOTE: Stock Kit is prepared for one degree floor slope to the inside of the shower. Shimming is required if floor is not a one degree slope to the inside of the shower, or a Custom Kit may be ordered instead.


CRL Glass Door Locks with Indicator

Swinging Door Application






Sliding Door Application







Exterior	View

Glass-to-Wall

Interior View

Cat No. / Description

Features





Cat. No. 700CXX Sliding Door Lock









Cat. No. 701CXX Sliding Door Receiver

- Lock Can Be Used Glass-to-Wall, or Glass-to-Glass With Optional Matching Receiver
- Available in Up to Five Popular Finishes: Chrome, Brass, Antique Brass, Brushed Nickel, and Oil Rubbed Bronze





Cat. No. 703CXX Sliding Door Lock





Cat. No. 704CXX Sliding Door Receiver

- · Choice of Swinging Door and Sliding Door
- Lock Can Be Used Glass-to-Wall, or Glass-to-Glass With Optional Matching Receiver
- Available in Up to Five Popular Finishes: Chrome, Brass, Antique Brass, Brushed Nickel, and Oil Rubbed Bronze

CRL Towel Bars

Material: 19mm Diameter Brass Tubing (1.5mm thick); 31.8mm Diameter Metal Washers

Glass Thickness Range: 6mm to 12mm Hole Diameter Required: 12mm





		GLASS
ew	Cat No. / Description	Centre-to-Centre Hole
	Cat. No. BM12XX	305mm Towel Bar
	Cat. No. BM18XX	457mm Towel Bar
	Cat. No. BM20XX	508mm Towel Bar
	Cat. No. BM22XX	559mm Towel Bar
	Cat. No. BM24XX	610mm Towel Bar
	Cat. No. BM26XX	660mm Towel Bar
	Cat. No. BM27XX	686mm Towel Bar
	Cat. No. BM28XX	711mm Towel Bar
	Cat. No. BM30XX	762mm Towel Bar
	Cat. No. BMNW12XX	305mm Towel Bar
6	Cat. No. BMNW18XX	457mm Towel Bar
	Cat. No. BMNW20XX	508mm Towel Bar
	Cat. No. BMNW22XX	559mm Towel Bar
	Cat. No. BMNW24XX	610mm Towel Bar
A	Cat. No. BMNW26XX	660mm Towel Bar
	Cat. No. BMNW27XX	686mm Towel Bar
	Cat. No. BMNW28XX	711mm Towel Bar
	Cat. No. BMNW30XX	762mm Towel Bar
	Cat. No. CSH18XX Cat. No. CSH24XX	457mm Towel Bar 610mm Towel Bar
	Cat. No. SQ18XX Cat. No. SQ24XX	457mm Towel Bar 610mm Towel Bar
	Cat. No. MT18XX Cat. No. MT24XX	457mm Towel Bar 610mm Towel Bar
	Cat. No. BM12X12XX Cat. No. BM18X18XX Cat. No. BM24X24XX Cat. No. BM30X30XX	305mm Towel Bar 457mm Towel Bar 610mm Towel Bar 762mm Towel Bar

CRL Towel Bars

Material: 19mm Diameter Brass Tubing (1.5mm thick); 31.8mm Diameter Metal Washers


Glass Thickness Range: 6mm to 12mm Hole Diameter Required: 12mm





Hole Diameter Required: 12mm		TOUGHENED 6 to 12mm
View	Cat No. / Description	Centre-to-Centre Hole
	Cat. No. BMNW12X12XX Cat. No. BMNW18X18XX Cat. No. BMNW24X24XX Cat. No. BMNW30X30XX	305mm Towel Bar 457mm Towel Bar 610mm Towel Bar 762mm Towel Bar
	Cat. No. CSH18X18XX Cat. No. CSH24X24XX	457mm Towel Bar 610mm Towel Bar
	Cat. No. SQ18X18XX Cat. No. SQ24X24XX	457mm Towel Bar 610mm Towel Bar
	Cat. No. MT18X18XX Cat. No. MT24X24XX	457mm Towel Bar 610mm Towel Bar
Pull Handle/ Towel Bar Combination	Cat. No. BM6X12XX Cat. No. BM6X18XX Cat. No. BM6X22XX Cat. No. BM6X24XX Cat. No. BM8X18XX Cat. No. BM8X20XX Cat. No. BM8X22XX Cat. No. BM8X24XX Cat. No. BM8X24XX	152mm Pull / 305mm Towel Bar 152mm Pull / 457mm Towel Bar 152mm Pull / 559mm Towel Bar 152mm Pull / 610mm Towel Bar 203mm Pull / 457mm Towel Bar 203mm Pull / 457mm Towel Bar 203mm Pull / 610mm Towel Bar 305mm Pull / 610mm Towel Bar
Pull Handle/Towel Bar Combination	Cat. No. BMNW6X12XX Cat. No. BMNW6X18XX Cat. No. BMNW6X22XX Cat. No. BMNW6X24XX Cat. No. BMNW8X18XX Cat. No. BMNW8X22XX Cat. No. BMNW8X22XX Cat. No. BMNW8X24XX	152mm Pull / 305mm Towel Bar 152mm Pull / 457mm Towel Bar 152mm Pull / 559mm Towel Bar 152mm Pull / 610mm Towel Bar 203mm Pull / 457mm Towel Bar 203mm Pull / 610mm Towel Bar 305mm Pull / 610mm Towel Bar


CRL Shower Door Seals

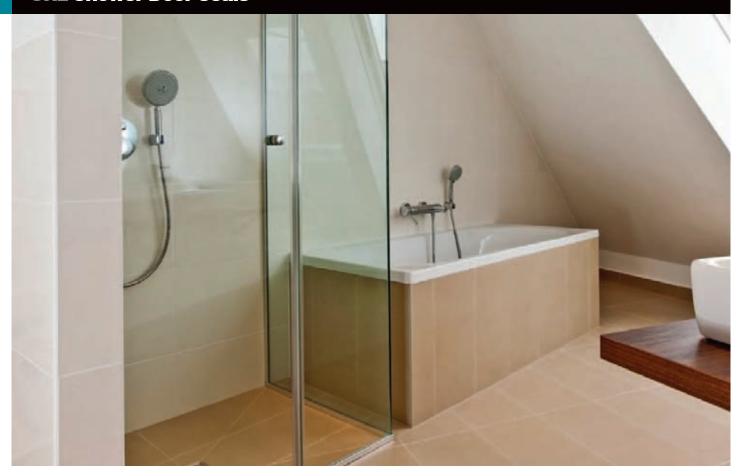

View	Features	Cat No. / Description
8mm	Can be used on inswing and outswing doors2.49m stock length	Cat. No. PCR8 CRL Translucent Vinyl Bulb Seal
10mm	Can be used on inswing and outswing doors2.49m stock length	Cat. No. PCR10 CRL Translucent Vinyl Bulb Seal
6mm	 Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways 	Cat. No. P14WS CRL Dual Durometer PVC Seal and Wipe
8mm	 Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways 	Cat. No. P770WS CRL Dual Durometer PVC Seal and Wipe
10mm	 Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways 	Cat. No. P880WS CRL Dual Durometer PVC Seal and Wipe
12mm	 Can be used as bottom sweep, or vertically on bi-fold doors 2.49m stock length Snap on application Can be used two ways 	Cat. No. P120WS CRL Dual Durometer PVC Seal and Wipe

CRL Shower Door Seals

View	Features	Glass Thickness	'X'	'Y'	Cat No. / Description
1	"X" 10mm	6mm 8mm 10mm 12mm	16mm 16mm 19mm 19mm	- - -	Cat. No. P914WS CRL Co-Extruded Bottom Wipe With Drip Rail Cat. No. P956WS CRL Co-Extruded Bottom Wipe With Drip Rail Cat. No. P990WS CRL Co-Extruded Bottom Wipe With Drip Rail Cat. No. P912WS CRL Co-Extruded Bottom Wipe With Drip Rail
A	"X" 11mm	8mm 10mm 12mm	10mm 11mm 12mm	- - -	Cat. No. P450BR CRL Clear Bottom Rail With Translucent Wipe Cat. No. P500BR CRL Clear Bottom Rail With Translucent Wipe Cat. No. P660BR CRL Clear Bottom Rail With Translucent Wipe
	"X"	8mm 10mm 12mm	19mm 21mm 21mm	11mm 12mm 12mm	Cat. No. PCC8 CRL "H" Jamb With Soft Leg Cat. No. PCC10 CRL "H" Jamb With Soft Leg Cat. No. PCC12 CRL "H" Jamb With Soft Leg
View		Features			Cat No. / Description
	8mm	Can be used on inswing and outswing doors Close Gaps from 1.6 to 5mm 2.49m stock length Adheres using silicone only (not very hi-bond tape)		·	Cat. No. S1LB CRL Translucent Silicone Bulb Seal
0	6.3mm	Labour saving	Pre-applied VHB tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths		Cat. No. SDTJT2 CRL SDTB with Pre-Applied Tape
0	6.3mm	Labour saving	 Pre-applied tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths 		Cat. No. SDTBT2 CRL Deep U-Channel for 10mm Glass
	7.5mm 6mm	 Pre-applied VHB tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths 			Cat. No. SDTDFT2 CRL SDTDF with Pre-Applied Tape
	8mm Soft Leg 8mm Rigid Leg	Labour saving	 Pre-applied tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths 		Cat. No. SDTNLT2 CRL SDTNL with Pre-Applied Tape
	8mm Soft Leg 8mm Rigid Leg	 Pre-applied high-bond tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths 			Cat. No. SDTLT2 CRL SDTL with Pre-Applied Tape
	8mm Soft Leg 8mm Rigid Leg	Labour saving	 Pre-applied high-bond tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths 		Cat. No. SDTST2 CRL SDTS with Pre-Applied Tape
	8mm	 Pre-applied tape for easy installation Labour savings due to pre-application of tape Stocked in 2.49m lengths 			Cat. No. SDTWT2 CRL SDTW with Pre-Applied Tape

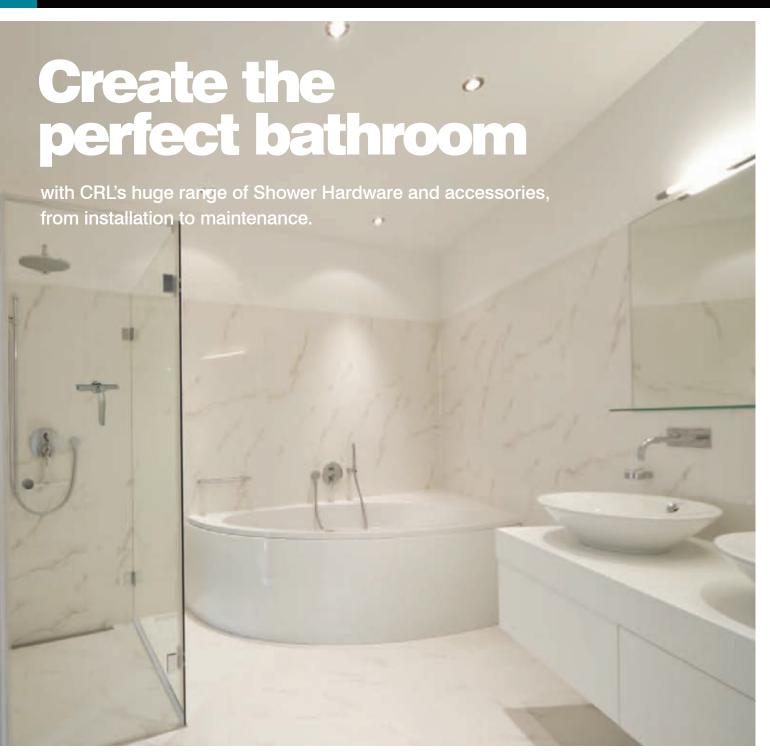

View Cat No. / Description Cat No. / Description



Cat. No. 1973 CRL Spray Glass Cleaner



Cat. No. PSB040 CRL Clear Plastic Setting Blocks



Cat. No. EWCW1 CRL Cleret Elite Squeegee



Cat. No. 16351 CRL E-Z Mount Mirror Clip Sets

View Cat No. / Description



Cat. No. NDC4XX No-Drill Fixed Panel Clamp



Cat. No. 17600 CRL Chrome Deluxe Shower Squeegee

Cat No. / Description



Cat. No. 31M8010XX 180° Wall Mount Hinge Hold Open Hydraulic Self -Close



Cat. No. S0RH1XX CRL Polished Chrome Designer Series Sleeve-Over Robe Hook



Cat. No. 31M8015XX 180º Glass-To-Glass Hinge Hold Open Hydraulic Self -Close



Cat. No. WSR1 CRL Bio-Clean Water Stain Remover



Cat. No. 31M8060XX One Way Swinging Wall Mount Hinge Hold Open Hydraulic Self -Close al for saunas



Cat. No. 33SC CRL Clear Silicone Sealant (Also available in black or white)



Cat. No. AU1826 - AU2432 CRL 240 Volt Rectangular Mirror Defogger



Cat. No. RTV408C CRL Clear Neutral Cure Silicone Sealant (Also available in black or white)



Cat. No. D645BA CRL Brite Anodised Nose Aluminum "J" Channel



Cat. No. WCS1 CRL Water Clear Silicone



Cat. No. SP101 CRL "Sparkle" Cleaner and Stain Remover



Cat. No. SCS2601 CRL Clear Neutral Sanitary Silicone



Cat. No. DL631XX CRI Adjustable Shelf Brackets



Cat. No. TREX100C CRL Crystal Clear T-Rex Power MS Adhesive



Cat. No. TPC16 CRL TPC Surface Protector




Cat. No. GN100A CRL Gunther Ultra/Bond Mirror Mastic

Colour range*

All CRL Frameless Shower Door products are available in a variety of beautiful stock finish to enhance the décor of the surrounding environments. Add the chosen colour code to a Cat No to complete your product code.

Note: Not all Finishes are available for every product, please call or



ABRZ Antique Bronze BBRZ Brushed Bronze BCO Brushed Copper PCO Polished Copper



Brushed Copper

BL Black

GP Gold Plated

GM Gun Metal

W White

BS Brushed Stainless


Steel

Steel

PS Polished Stainless

CBA Chrome/Brass

^{*} The finishes shown are as close as possible to the actual item. Some images might look a little different when compared to the actual product.

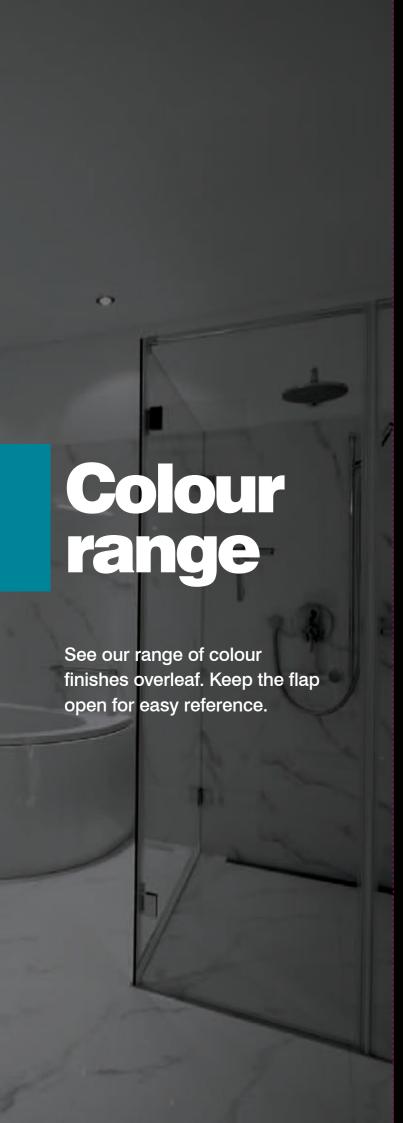

Call FREE on 1800 424 275 Fax FREE on 1800 813 013

Melbourne

42 Enterprise Drive Rowville Vic 3178 Tel. +61 3 9764 8322 Fax. +61 3 9764 8378

www.crlaurence.com.au

Sydney 9 Shale Place Eastern Creek NSW 2766 Tel. +61 2 9851 3444

Fax. +61 2 9851 3445 www.crlaurence.com.au



View Our Full Range of Frameless Shower Door Hardware and Supplies...

You may also be interested in...

Catalogues are available to download or view online at crlaurence.com.au

