

NEW CRL LAGUNA SERIES WITH "SOFTBRAKE" FOR QUIET CLOSURE

Softbrake Available for Wall Mount Laguna Series Only

- Ideal for Interior Applications
- Now Available With **NEW** Double Roller Design
- Anti-Lift Feature for Added Safety
- All 316 Grade Stainless Steel Construction
- For Use With 3/8" or 1/2" (10 or 12 mm) Monolithic Tempered Glass
- Comes With All Fasteners Needed for Either Flush (Countersunk) or Surface (Straight Hole) Mounting
- Adaptor Kits Available for Wood Door Applications




Our popular **Laguna Series Sliding Door System** now has an optional **NEW 'Softbrake' Braking Feature** that, along with some very subtle changes, has improved the performance and safety of the system. The **Laguna Series Sliding Glass Door System** can be installed on glass partitions or directly to the side of a sufficiently reinforced wall. The adjustable top rollers make final adjustments quick and easy, without the need to remove the door. Their smooth operation and solid stainless steel construction minimizes maintenance issues.

CRL provides you with all the glass attachment fasteners for either flush mounting, requiring a countersunk hole, or surface mounting, requiring a straight hole. The glass attachment fasteners accommodate either 3/8" or 1/2" (10 or 12 mm) monolithic tempered glass.

NOTE: Laminated glass cannot be used in the Laguna System.

DOOR SYSTEM LIMITATIONS

Maximum Door Weight:	220 lbs. (100 kg)
Maximum Panel Width:	53-1/2" (1.36 m)
Maximum Panel Height:	98-7/16" (2.50 m)
Maximum Track Length:	104" (2.64 m)

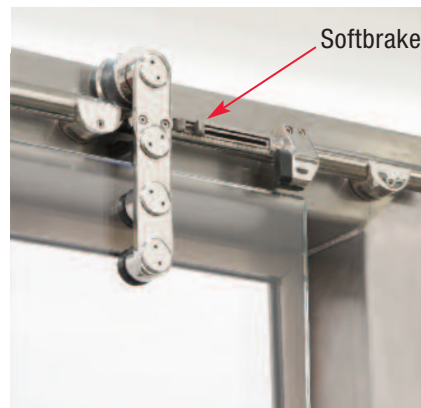

All of our standard kits are now available with the optional 'Softbrake' Braking Feature. Standard sets allow you to make planning and purchasing quick and easy for basic installations.




NOW AVAILABLE
in **MATTE BLACK** finish



C.R. LAURENCE COMPANY
crlaurence.com | usalum.com | crl-arch.com

Phone: (800) 421-6144 Ext. 7770 | Email: partitions@crlaurence.com

CRL LAGUNA SERIES SLIDING GLASS DOOR SYSTEM WITH ANTI-LIFT FEATURES

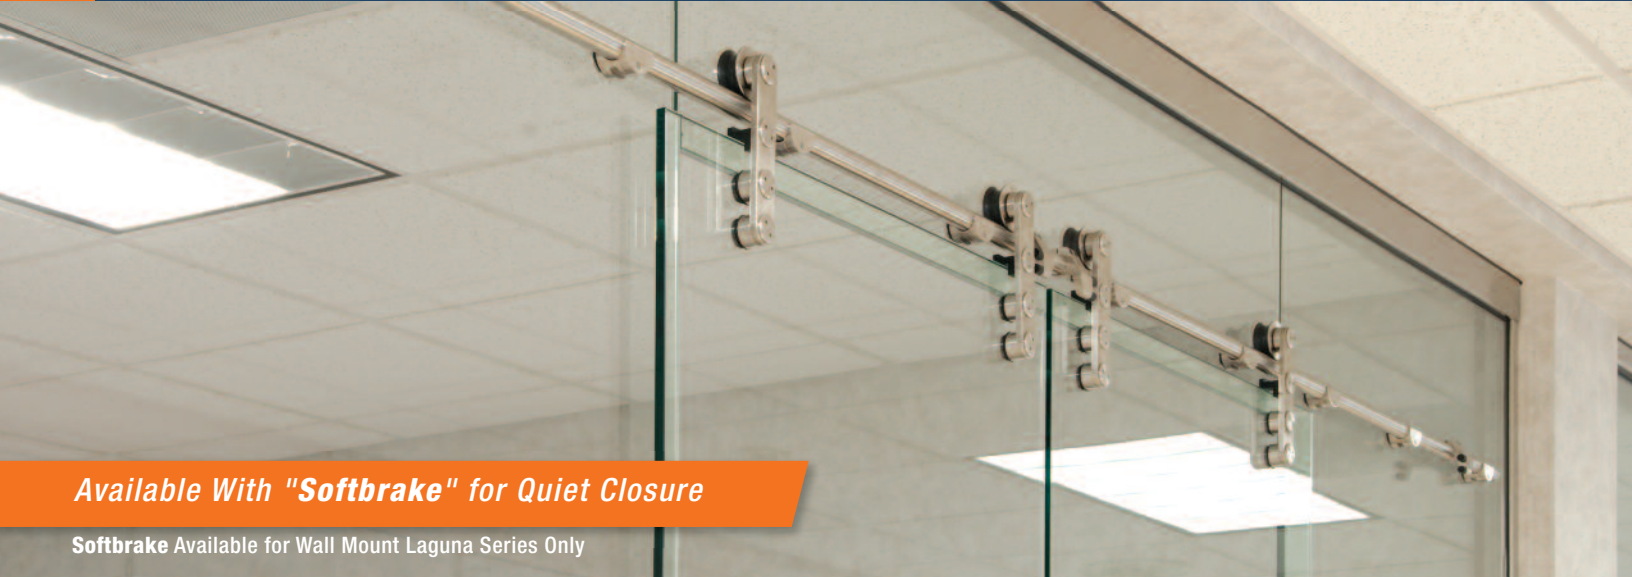

Available With "Softbrake" for Quiet Closure

Softbrake Available for Wall Mount Laguna Series Only

- Anti-Lift Feature for Added Safety
- All 316 Grade Stainless Steel Construction
- Ideal for Interior Applications
- For Use With 3/8" or 1/2" (10 or 12 mm) Monolithic Tempered Glass
- Comes With All Fasteners Needed for Either Flush (Countersunk) or Surface (Straight Hole) Mounting
- Adaptor Kits Available for Wood Door Applications



We have upgraded our popular **Laguna Series Sliding Glass Door System** to now include an **'Anti-Lift'** feature. Through a combination of additions and very subtle changes, we have improved the performance, safety, and security while still offering a clean, contemporary look. The Laguna Series Sliding Glass Door System can be installed on glass partitions or directly to the side of a sufficiently reinforced wall. The adjustable Top Rollers make final adjustments quick and easy, without the need to remove the door. Their smooth operation and solid stainless steel construction minimizes maintenance issues.

CRL provides you with all the glass attachment fasteners for either flush mounting, requiring a countersunk hole, or surface mounting, requiring a straight hole. The glass attachment fasteners accommodate either 3/8" or 1/2" (10 or 12 mm) monolithic tempered glass. **NOTE:** Laminated glass cannot be used in these systems.

Standardized sets allow you to make planning and purchasing quick and easy for basic installations. We offer four different kits; two for wall mounting, and two for glass mounting. Available accessories give you the opportunity to customize the standard sets to accommodate the most imaginative designers.



NOW AVAILABLE
in **MATTE BLACK** finish



DOOR SYSTEM LIMITATIONS

Maximum Door Weight:	220 lbs. (100 kg)
Maximum Panel Width:	53-1/2" (1.36 m)
Maximum Panel Height:	98-7/16" (2.50 m)
Maximum Track Length:	104" (2.64 m)



C.R. LAURENCE COMPANY
crlaurence.com | usalum.com | crl-arch.com

Phone: (800) 421-6144 Ext. 7770 | Email: partitions@crlaurence.com